




TERMWH03\*\*\*



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

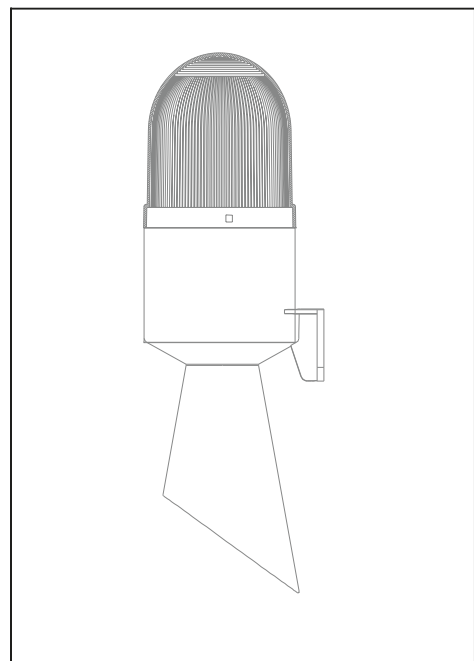

Model	Power Supply	Current (mA) Max.
TERMWH03***	12-24V AC/DC	102mA
TERMWH03***	40-250V AC/DC 50Hz	101mA

Sound Intensity			
Melody	Cable Color	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
1	Red	126	105
2	Green	127	104
3	Yellow	129	108
4	Blue	129	105
5	White	126	107
6	Orange	130	107
7	Brown	128	103
8	Misuse	123	98

\* Values may vary by +/- %5.

Model	Weight	Color
TERMWH03***	280gr	(1) Red (2) Green (3) Yellow
TERMWH03***	300gr	(4) Blue (5) White




It is recommended that people with epilepsy should not use it.



**T.E.R. Tecno Elettrica Ravas Srl a socio unico**  
 Via Garibaldi 29/31 - 23885 Calco (LC) - Italy  
 Tel. +39 039 9911011 - Fax +39 039 9910445  
 E-mail: [info@ter.it](mailto:info@ter.it) - [www.ter.it](http://www.ter.it)  
 Sede Legale - Registered Office  
 Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


## TECHNICAL DIAGRAM

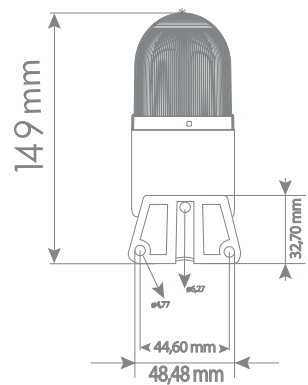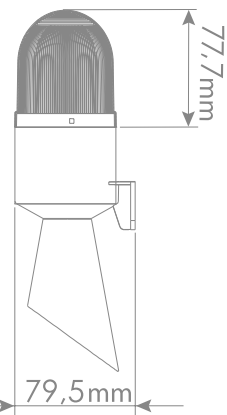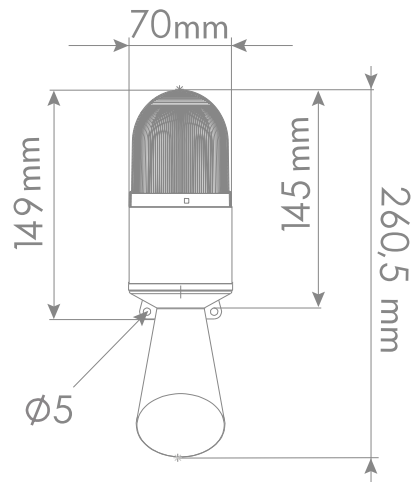

2

## WIRING DIAGRAM

12-24V AC/DC

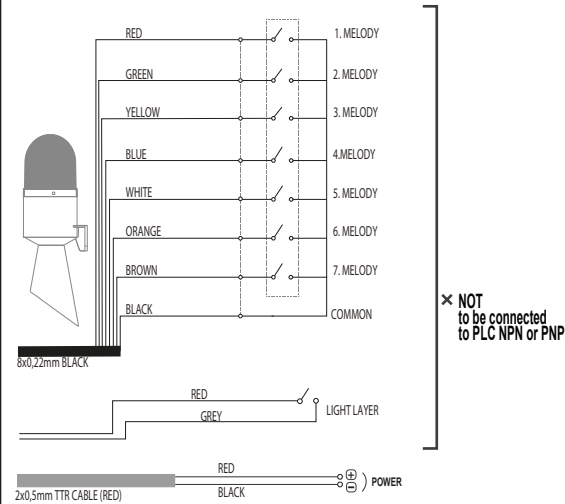

2a

## WIRING INSTRUCTION




(EN)

**Melody W res:** Red-Green-Yellow-Blue-White-Orange-Brown  
**S gnal W res:** Black-Gray  
**L ght W res:** Red  
**Power Supply Cable:** 2x0,50 TTR (Red-Black for 12-24V AC/DC and Blue-Brown for 40-250V AC/DC)

- Do not supply power to the Melody, Signal, and Light Wires, and do not connect them to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
  - The product warranty will be void if power is supplied to the Melody, Signal and Light Wires
  - For melodies, make a dry contact connection between the Melody wires and the Black signal wire.
  - For light, make a dry contact connection between the Light wires and the Gray signal wire.
- ⏪ ⏩ ⏴ ⏵ ⏶ ⏷
- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.

3

## SPARE PARTS



TERMSP0103R (RED)  
 TERMSP0103G (GREEN)  
 TERMSP0103Y (YELLOW)  
 TERMSP0103B (BLUE)  
 TERMSP0103W (WHITE)

2

## WIRING DIAGRAM

40-250V AC/DC

