TERMOL0500*
TERMOL0501*
TERMOL0502*
TERMOL0503*

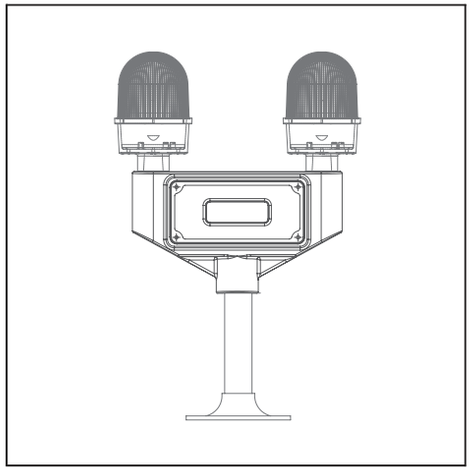

Low-intensity B Type Obstruction Lights manufactured in compliance with International Civil Aviation Organization (ICAO), Aerodromes, Annex 14, Volume 1, Photometry - Paragraph. 6.2.1.2 Table 6-1 and Table 6-2, Chromaticity - Appendix 1Sec. 2.3.1

- Ürünün Bağlantısı Sadece Elektrik Teknisyenleri Tarafından Yapılmalıdır.
- Ürün İç Ve Dış Mekanda Kullanılabilir.
- Ürünün İç Ve Dış Mekana Uyumluluğu Resimdeki Gibidir.
- Ürün Titreşim Ve Isının En Az Olduğu Yere Montaj Edilmelidir.

- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

İÇ MEKAN / INDOOR

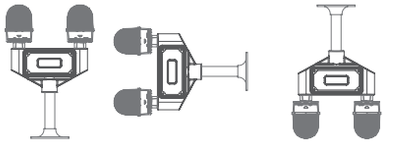

DIŞ MEKAN / OUTDOOR

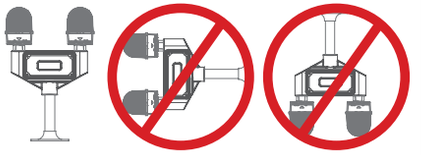

Model	Voltaj / Power Supply	Akım / Current (mA) Max.
TERMOL0500***	12V/DC	595mA
TERMOL0501***	24V/DC	265mA
TERMOL0502***	48V/DC	200mA
TERMOL0503***	85-250V AC/DC 50Hz	40mA

* Değerler +/- %5 değişiklik gösterebilir.

* Values may vary by +/- %5.

Model	Ağırlık / Weight	Renk / Color
TERMOL0500***	4650gr	(1) Kırmızı / Red (2) Yeşil / Green (3) Sarı / Yellow (4) Mavi / Blue (5) Beyaz / White
TERMOL0501***	4650gr	
TERMOL0502***	4778gr	
TERMOL0503***	4778gr	

Epilepsi hastalığı olanların kullanmaması önerilir.
It is recommended that people with epilepsy should not use it.

T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1

ÖLÇÜLER / DIMENSIONS

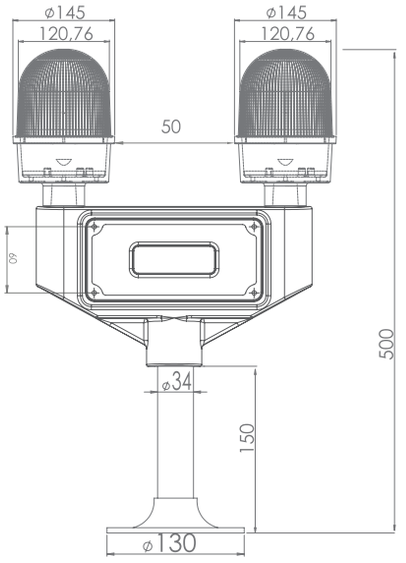



2

12V/DC - 24V/DC - 48V/DC

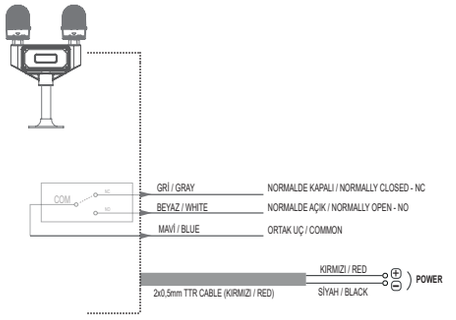

2

85-250V AC/DC

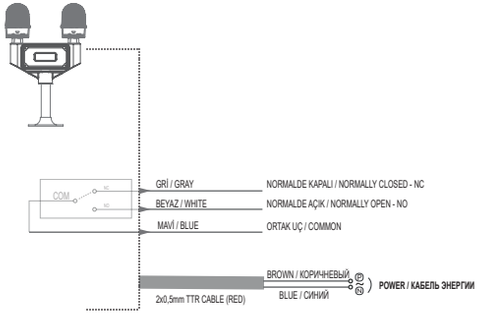

2a

- Besleme kabloları (2x0.50) dışında kontak kablolarına enerji vermeyiniz.
- Işık seviyesini algılayarak karanlıkta devreye girer, aydınlıkta devreden çıkar.
- 30 sn. boyunca geçici ışık kaybını dikkate almaz ve ışık yanılgısını ortadan kaldırır.
- %30 üzeri ışık kaybında ve enerji kesintisinde normalde açık, normalde kapalı röle çıkışı verir.
- 10km. gözükme mesafesi

- Do not energize for the contact cables except supply cables (2x0.50).
- By perceiving the level of light becomes active in the dark,becomes deactive in the daylight.
- It does not take account of the temporary loss of light throughout 30 sec. and It abolishes the light illusion.
- In light loss and electricity interruption over 30%, normally open, normally closed relay output.
- Visibility from 10km.

YEDEK PARÇALAR / SPARE PARTS



TERMSP0700



TERMSP0100R (KIRMIZI / RED)
TERMSP0100G (YEŞİL / GREEN)
TERMSP0100Y (SARI / YELLOW)
TERMSP0100B (MAVİ / BLUE)
TERMSP0100W (BEYAZ / WHITE)





TERMSP0401