


CONNECTION PIN-OUT

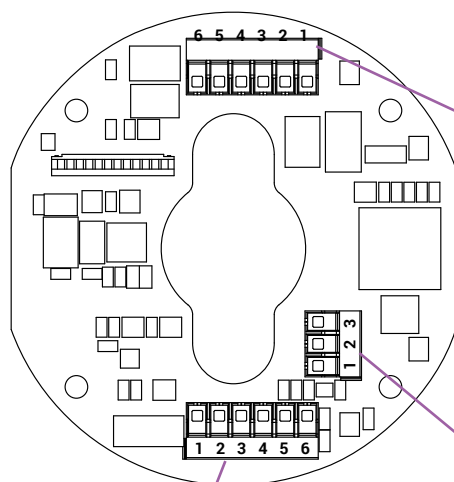

| POS | Relays | Description |
|-----|---------|-------------|
| 1 | Relay 1 | NO |
| 2 | Relay 1 | COM |
| 3 | Relay 1 | NC |
| 4 | Relay 2 | NO |
| 5 | Relay 2 | COM |
| 6 | Relay 2 | NC |

| POS | Relays | Description |
|-----|---------|-------------|
| 1 | Relay 3 | NO |
| 2 | Relay 3 | COM |
| 3 | Relay 3 | NC |
| 4 | Relay 4 | NO |
| 5 | Relay 4 | COM |
| 6 | Relay 4 | NC |

| POS | Description |
|-----|-----------------|
| 1 | 12...30 Vdc |
| 2 | I OUT 4...20 mA |
| 3 | GND - 0 V |

PANDIA - REQUEST FORM FOR CABLE TRANSDUCER

Instructions

- 1 **Interface:** tick the box corresponding to the type of interface required.
- 2 **Wire measuring range:** tick the box corresponding to the wire measuring range required..
- 3 **Hooking ring:** tick the box corresponding to the diameter required for the wire hooking ring.

Wire hooking ring diameter

- ☐ 10 mm
- ☐ 15 mm

Remarks

Interface 1

- ☐ Analog 4...20 mA with 4 relays (output with cable gland)
- ☐ Analog 4...20 mA without relays (output with connector)

Wire measuring range 2

- ☐ 3000 mm
- ☐ 5000 mm