



TERMHD0600\*  
TERMHD0601\*  
TERMHD0602\*



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

Model	Power Supply	Current (mA) Max.
TERMHD0600***	12-30V/DC	1520mA
TERMHD0601***	48V/DC	456mA
TERMHD0602***	85-250V AC/DC 50Hz	210mA


Sound Intensity			
Melody	Cable Color	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
1	Red	128	121
2	Green	123	119
3	Yellow	121	119
4	Blue	125	117
5	White	117	107
6	Orange	128	117
7	Brown	117	105
8	Misuse	123	115

\* Values may vary by +/- %5.

Model	Weight	Color
TERMHD0600***	3310gr	(1) Red (2) Green (3) Yellow (4) Blue (5) White
TERMHD0601***	3310gr	
TERMHD0602***	3360gr	






It is recommended that people with epilepsy should not use it.

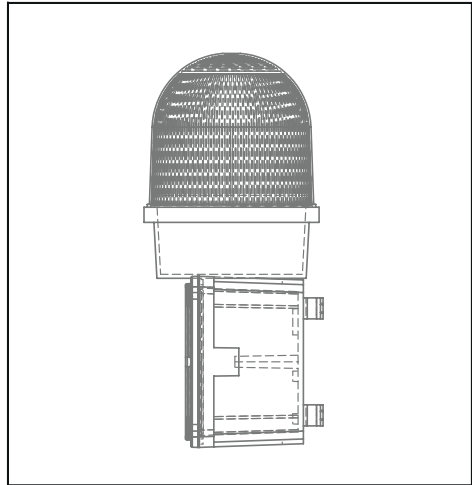

**T.E.R. Tecno Elettrica Ravasi Srl a socio unico**  
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy  
Tel. +39 039 9911011 - Fax +39 039 9910445  
E-mail: [info@ter.it](mailto:info@ter.it) - [www.ter.it](http://www.ter.it)  
Sede Legale - Registered Office  
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


## DIMENSIONS

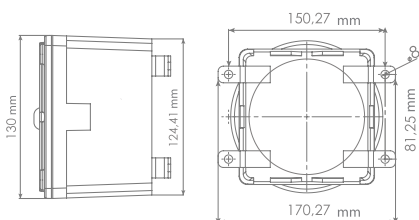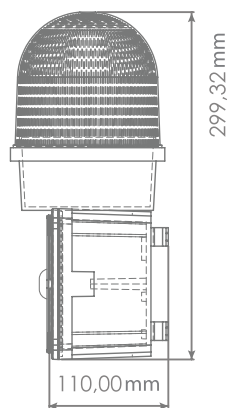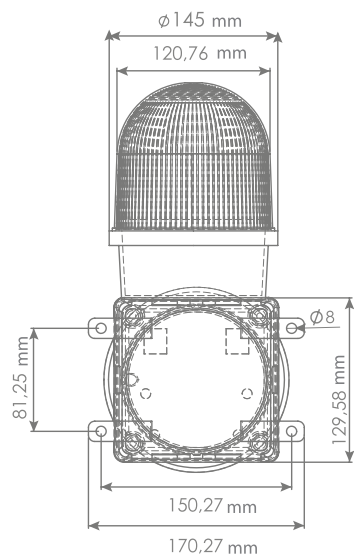

2

## WIRING DIAGRAM

12-30V/DC - 48V/DC

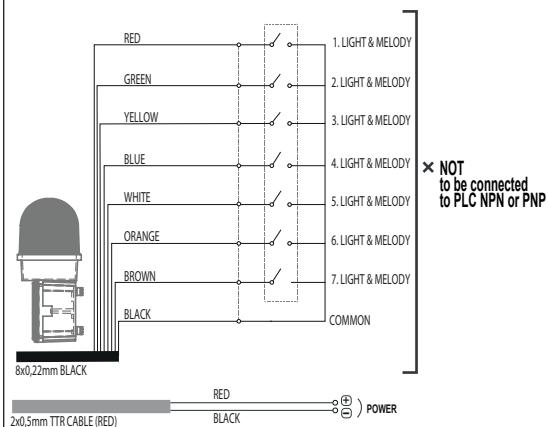

2a

## WIRING INSTRUCTION



EN

**Melody&Light Wires:** Red-Green-Yellow-Blue-White-Orange-Brown  
**Signal Wires:** Black  
**Power Supply Cable:** 2x0.50 TTR  
 (Red-Black for 12-24V AC/DC and 48V DC  
 Blue-Brown for 40-250V AC/DC)

- Do not supply power to the Melody&Light and Signal Wires, and do not connect them to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Melody&Light and Signal Wires.
- For melodies and light, make a dry contact connection between the Melody&Light wires and the Black signal wire.
- When the cable is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order:  
**Red, Green, Yellow, Blue, White, Orange, Brown.**
- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.




4

## SPARE PARTS



TERMSP0700



TERMSP0100R (RED)  
 TERMSP0100G (GREEN)  
 TERMSP0100Y (YELLOW)  
 TERMSP0100B (BLUE)  
 TERMSP0100W (WHITE)