




TERMBH05***



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

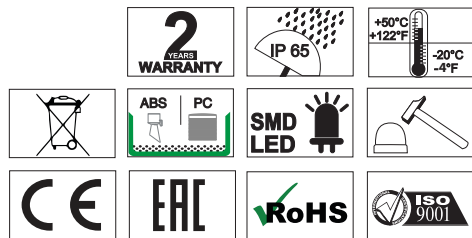

Model	Power Supply	Current (mA) Max.
TERMBH05***	12-24V AC/DC	55mA
TERMBH05***	40-250V AC/DC 50Hz	10mA


Melody	Sound Intensity (10cm) Min - Max	Sound Intensity (100cm) Min - Max
M1	121	98
M2	119	98

* Values may vary by +/- %5.


Model	Weight	Color
TERMBH05***	210 - 235gr	(1) Red (2) Green (3) Yellow (4) Blue (5) White




It is recommended that people with epilepsy should not use it.

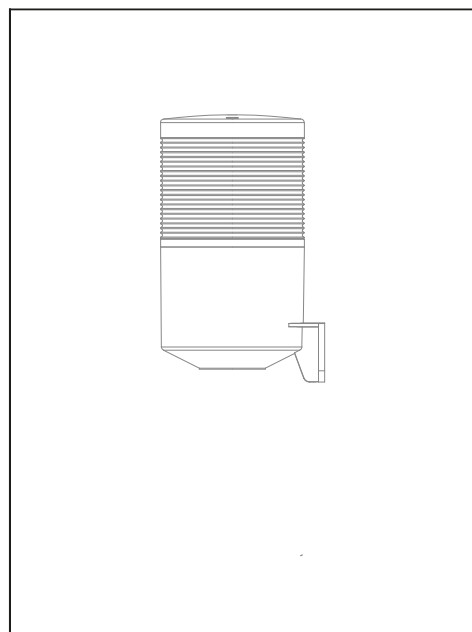

INDOOR




OUTDOOR



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

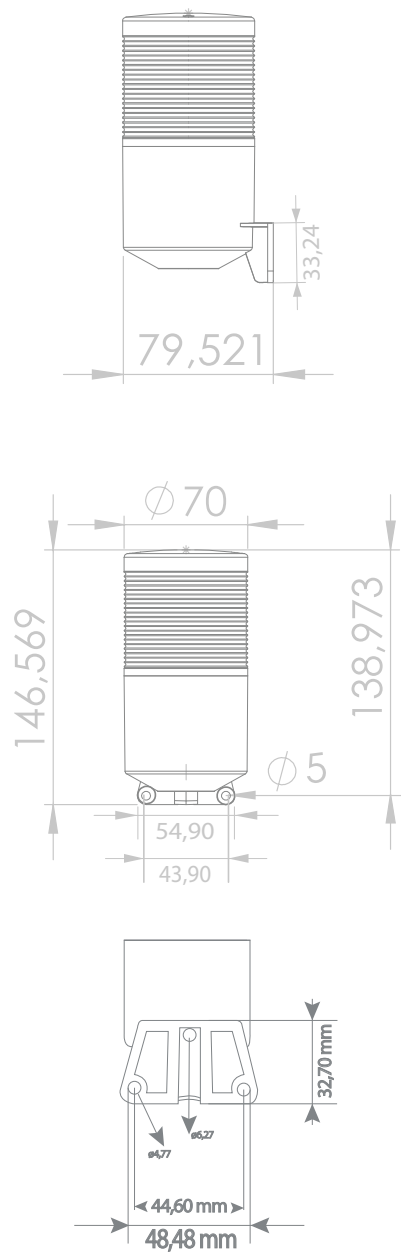

2

WIRING DIAGRAM

12-24V AC/DC

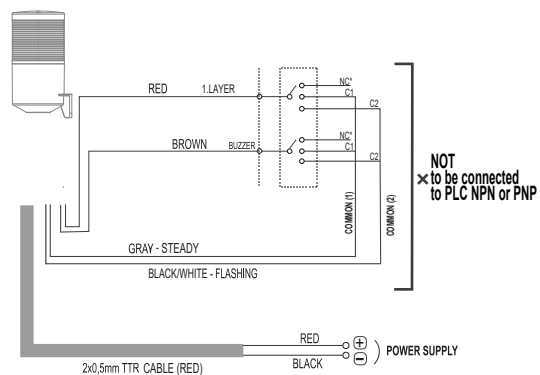


*NC - No connection

2

WIRING DIAGRAM

40-250V AC/DC

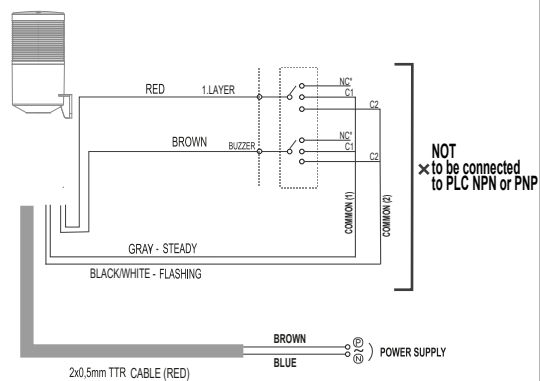

*NC - No connection

2a

WIRING INSTRUCTION



(EN)

Layer Wires: Red (Brown)
Signal Wires: Gray and Black-White
Power Supply Cable: 2x0.50 TTR (Red-Black for 12-24v ac/dc and Blue-Brown for 40-250v ac/dc)

- 12-24V AC/DC and 40-250V AC/DC series products are fed stably via the motherboard.
- Do not supply power to the Layer and Signal Wires or not be connected to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Layer and Signal Wires.
- For Steady, Strobe, Rotating Light, and Steady Buzzer, make a dry contact connection with the Gray signal wire.
- For Flashing Light and Flashing Buzzer, make a dry contact connection with the Black-White signal wire.


SPARE PARTS



TERMSP0200 (BLACK)



TERMSP0104R (RED)
 TERMSP0104G (GREEN)
 TERMSP0104Y (YELLOW)
 TERMSP0104B (BLUE)
 TERMSP0104W (WHITE)



TERMSP0105R (RED)
 TERMSP0105G (GREEN)
 TERMSP0105Y (YELLOW)
 TERMSP0105B (BLUE)
 TERMSP0105W (WHITE)

