

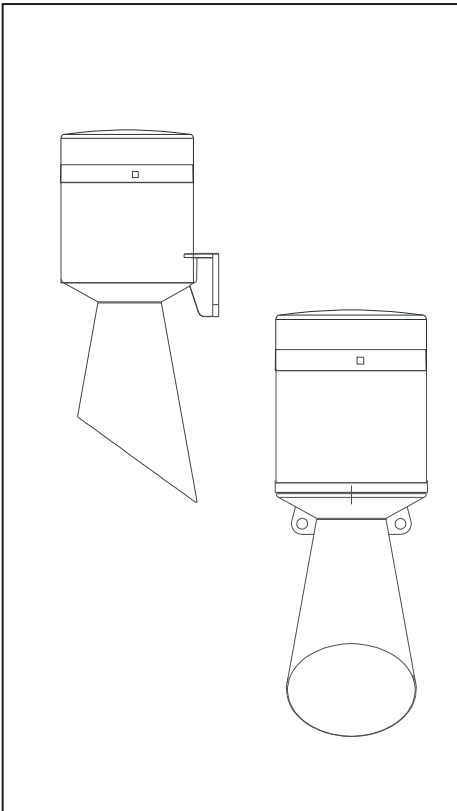







TERMWL0600
TERMWL0601



(EN)

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

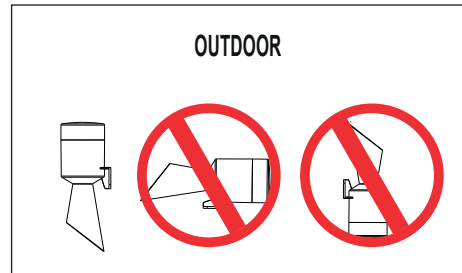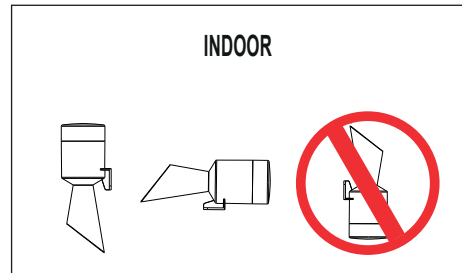

TERMWL06 Model		
P/N	Power Supply	Current (mA) Max.
TERMWL0600	12-24V /DC	190mA
TERMWL0601	40-250 AC/DC 50Hz	45mA

Light Pattern		
P/N	Light Pattern	Melody
TERMWL0600	Flashing Strobe Slow Flashing Steady	16
TERMWL0601		

Sound Intensity		
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	108-120	93-103
M2	107-122	90-106
M3	96-116	84-101
M4	109-119	88-110
M5	107-118	92-103
M6	109-121	91-105
M7	104-119	88-104
M8	107-120	89-100
M9	107-120	93-105
M10	110-120	96-105
M11	111-121	95-105
M12	110-121	94-107
M13	108-117	91-100
M14	109-119	91-101
M15	109-119	92-101
M16	108-117	91-100

*** Values may vary by +/- 5%.

Weight		
P/N	Weight	Color
TERMWL0600	265-275gr	Red Green Blue Yellow
TERMWL0601	275-285gr	






*It is recommended that people with epilepsy should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

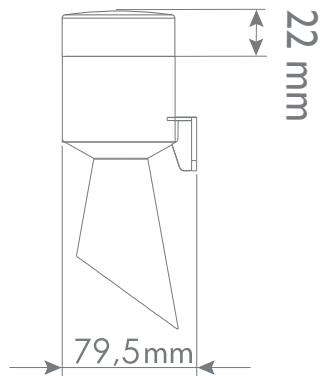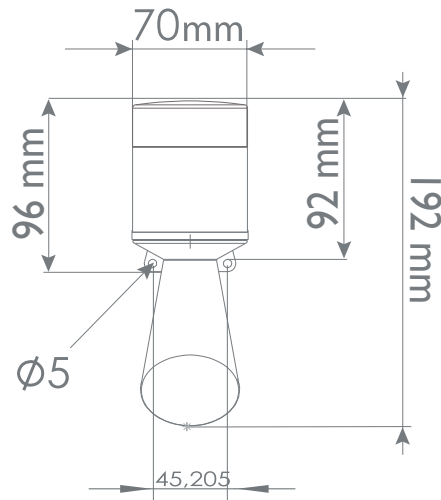

2

WIRING DIAGRAM

12-24V DC

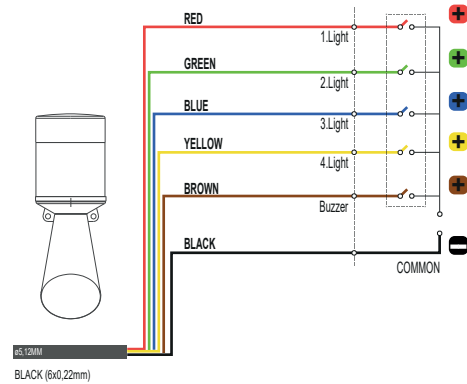

2a

WIRING INSTRUCTION

12-24V DC

(EN)


Light Wires: Red-Green-Blue-Yellow
Buzzer Wire: Brown
Common Wire: Black

- The 12-24V DC RGB series products are current-protected.
- The Melody and Buzzer wires can be connected to the NPN/PNP terminals of a PLC.
- When the cable specified is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order: **Red, Green, Blue, Yellow.**

3

WIRING DIAGRAM

40-250V AC/DC

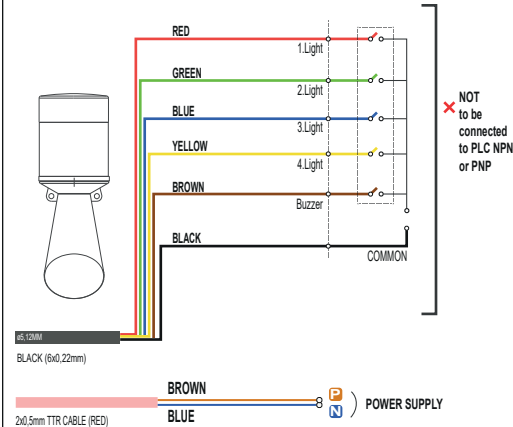

3a

WIRING INSTRUCTION

40-250V AC/DC


(EN)

Light Wires: Red-Green-Blue-Yellow
Buzzer Wire: Brown
Common Wire: Black
Power Supply Cable: 2x0,50 TTR (Blue-Brown)

- Do not supply power to the Light,Buzzer and Common Wires, and do not connect directly to PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Light,Buzzer and Common Wires.
- For Light and Buzzer, make a dry contact connection between the Light,Buzzer and the Black Common wire.
- When the cable specified is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order: **Red, Green, Blue, Yellow.**

4

LIGHT&MELODY ADJUSTMENT

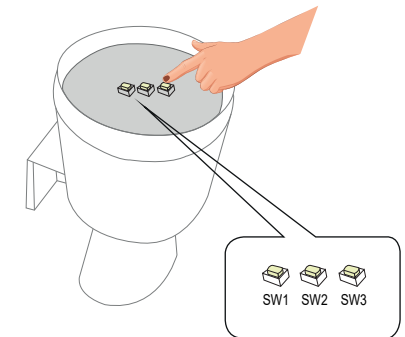

- ☼ SW1: Light mode selection button.
- 🎵 SW2: Melody selection button.
- 🔊 SW3: Sound Intensity selection button.

- ⚡ VOL1: 25% - lowest volume
- ⚡ VOL2: 50% - medium level volume
- ⚡ VOL3: 100% - highest volume

5

SPARE PARTS

