





TERMOL0100*
TERMOL0101*
TERMOL0102*
TERMOL0103*



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.




Model	Power Supply	Current (mA) Max.
TERMOL0100***	12V/DC	595mA
TERMOL0101***	24V/DC	265mA
TERMOL0102***	48V/DC	200mA
TERMOL0103***	85-250V AC/DC 50Hz	40mA

* Values may vary by +/- %5.

Model	Weight	Color
TERMOL0100***	361gr	(1) Red (2) Green (3) Yellow (4) Blue (5) White
TERMOL0101***	361gr	
TERMOL0102***	385gr	
TERMOL0103***	411gr	




It is recommended that people with epilepsy should not use it.

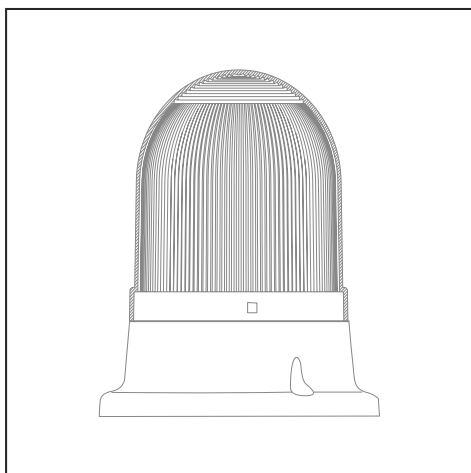

Low-intensity B Type Obstruction Lights
manufactured in compliance
with International Civil Aviation Organization
(ICAO), Aerodromes, Annex 14, Volume 1,
Photometry - Paragraph. 6.2.1.2 Table 6-1 and
Table 6-2, Chromaticity - Appendix 1 Sec. 2.3.1

INDOOR





OUTDOOR



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy


1

DIMENSIONS

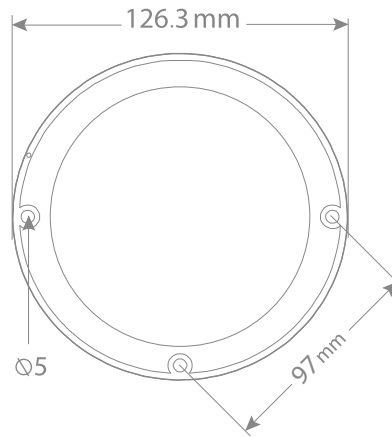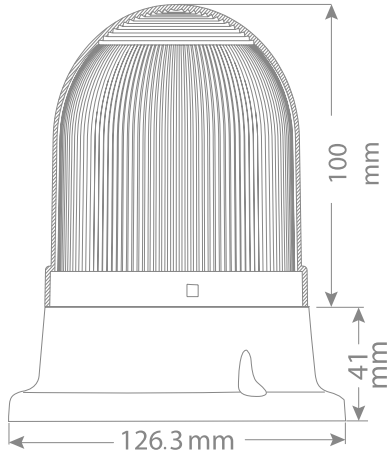


2

12V/DC - 24V/DC - 48V/DC

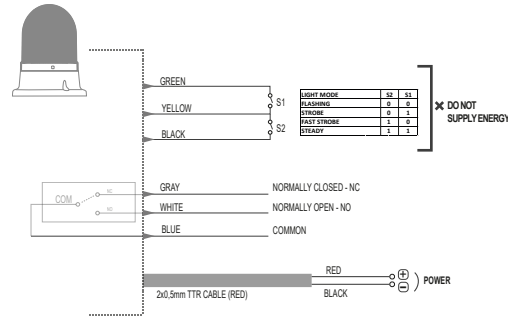

2

85-250V AC/DC

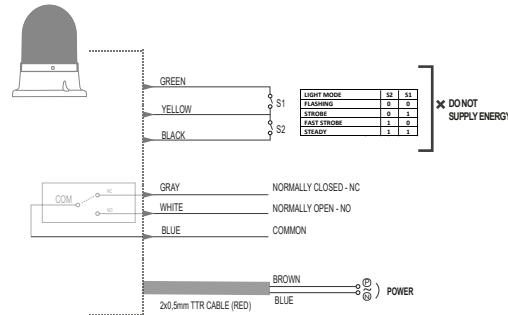


2a


- Besleme kabloları (2x0.50) dışında kontak kablolarına enerji vermeyiniz.
- Işık seviyesini algılayarak karanlıkta devreye girer, aydınlıkta devreden çıkar.
- 30 sn. boyunca geçici ışık kaybını dikkate almaz ve ışık yanılığını ortadan kaldırır.
- %30 üzeri ışık kaybında ve enerji kesintisinde normalde açık, normalde kapalı röle çıkışı verir.
- 10km. gözükme mesafesi
- Do not energize for the contact cables except supply cables (2x0.50).
- By perceiving the level of light becomes active in the dark, becomes deactive in the daylight.
- It does not take account of the temporary loss of light throughout 30 sec. and it abolishes the light illusion.
- In light loss and electricity interruption over 30%, normally open, normally closed relay output.
- Visibility from 10km.




- Yellow-Black / Fast Strobe
- Yellow-Green / Strobe
- Yellow-Black-Green / Steady
- No cable contact is required for flasher light mode.




SPARE PARTS



TERMSP0701



TERMSP0101R (RED)
TERMSP0101G (GREEN)
TERMSP0101Y (YELLOW)
TERMSP0101B (BLUE)
TERMSP0101W (WHITE)



TERMSP0601