

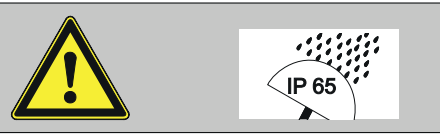


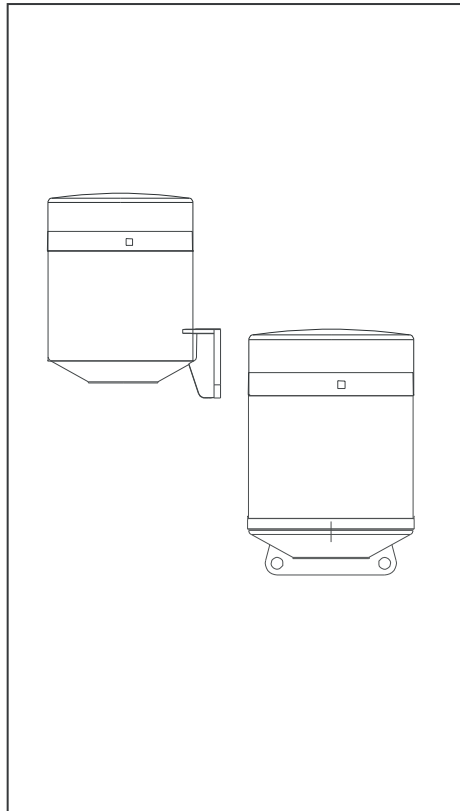


TERMES0204
TERMES0205



(EN)

- The electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat are minimal.

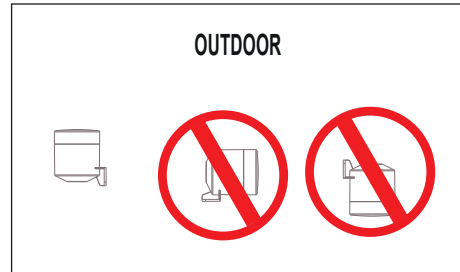

TERMES02 Model		
P/N	Power Supply	Current (mA) Max.
TERMES0204	12-24V AC/DC	102mA
TERMES0205	40-250V AC/DC 50Hz	101mA

Sound Intensity			
Melody	Cable Color	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
1	Red	126	105
2	Green	127	104
3	Yellow	129	108
4	Blue	129	105
5	White	126	107
6	Orange	130	107
7	Brown	128	103
8	Misuse	123	98

*** Values may vary by +/- 5%.

Weight	
P/N	Weight
TERMES0204	185-195gr
TERMES0205	195-205gr





*It is recommended that people with epilepsi should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy


1

TECHNICAL DIAGRAM

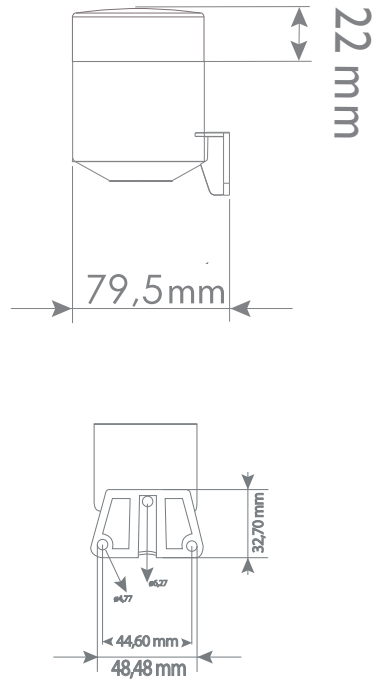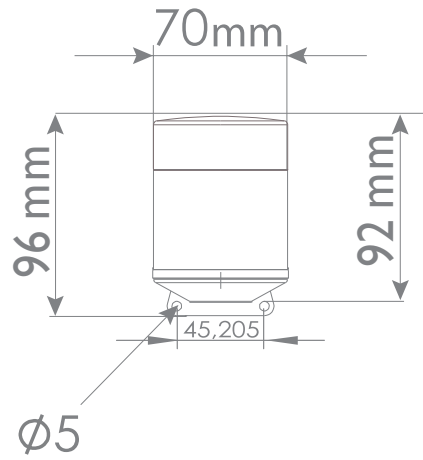

2

WIRING DIAGRAM

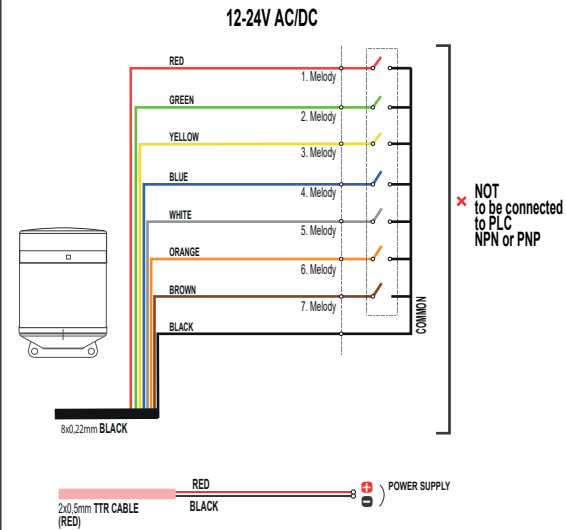

2a

WIRING INSTRUCTION



EN

Melody Wires: Red-Green-Yellow-Blue-White-Orange-Brown
Common Wires: Black

Power Supply Cable: 2x0,50 TTR (Red-Black for 12-24V AC/DC and Blue-Brown for 40-250V AC/DC)

- Do not supply power to the Melody and Common Wires, and do not connect directly to NPN or PNP terminals of any PLC to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Melody and Common Wires.
- For melodies, make a dry contact connection between the Melody wires and the Black Common wire.
- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.




3

SPARE PARTS



TERMSP0201



2

WIRING DIAGRAM

