





TERMES0100
TERMES0101



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.



Model	Power Supply	Current (mA)Max.
TERMES0100	12-24V AC/DC	125mA
TERMES0101	40-250V AC/DC 50 Hz	70mA

Melody	Sound	Intensity(dB)(1m)
	Intensity(dB) (10cm) Min - Max	
M1	107-130	93-112
M2	115-130	94-111
M3	121-125	98-106
M4	121-129	103-110
M5	122-129	100-110
M6	121-131	97-111
M7	117-123	92-105
M8	120-129	102-110
M9	117-129	93-109
M10	121-129	102-110
M11	108-127	89-108
M12	111-129	92-113
M13	109-126	87-105
M14	108-126	88-105
M15	109-126	88-105
M16	110-126	87-103

* Values may vary by +/- %5.

Model	Weight
TERMES0100	190gr
TERMES0101	212gr



It is recommended that people with epilepsy should not use it.

INDOOR






OUTDOOR




T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1

DIMENSIONS

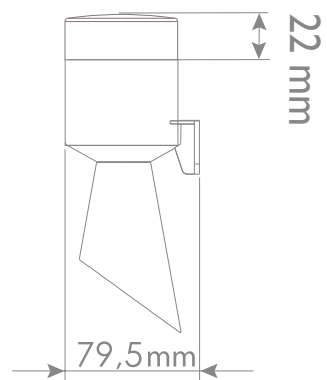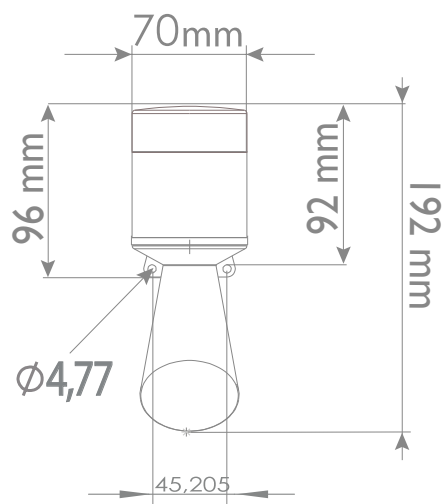

2

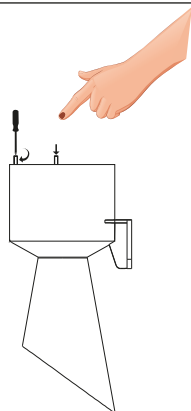

2a

🎵 To change the melodies, press and release the melody button.

VOLUME Adjusting the sound level with potentiometer.


SPARE PARTS



TERMSP0201

3

12-24V AC/DC

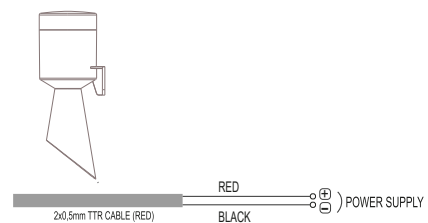

3

40.250V AC/DC

