




TERMOL0300*
TERMOL0301*
TERMOL0302*
TERMOL0303*



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.




Model	Power Supply	Current (mA) Max.
TERMOL0300***	12V/DC	595mA
TERMOL0301***	24V/DC	265mA
TERMOL0302***	48V/DC	200mA
TERMOL0303***	85-250V AC/DC 50Hz	40mA

* Values may vary by +/- %5.

Model	Weight	Color
TERMOL0300***	1928gr	(1) Kırmızı / Red (2) Yeşil / Green (3) Sarı / Yellow (4) Mavi / Blue (5) Beyaz / White
TERMOL0301***	1928gr	
TERMOL0302***	1949gr	
TERMOL0303***	1968gr	




It is recommended that people with epilepsy should not use it.

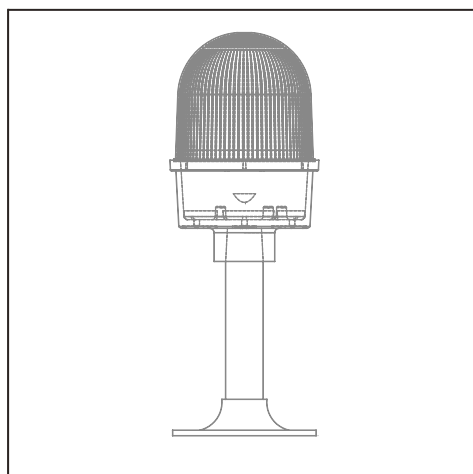


Low-intensity B Type Obstruction Lights
manufactured in compliance
with International Civil Aviation Organization
(ICAO), Aerodromes, Annex 14, Volume 1,
Photometry - Paragraph. 6.2.1.2 Table 6-1 and
Table 6-2, Chromaticity - Appendix 1Sec. 2.3.1

INDOOR




OUTDOOR

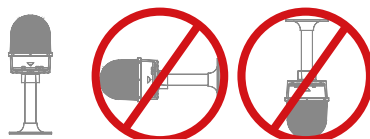

T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy


1

DIMENSIONS

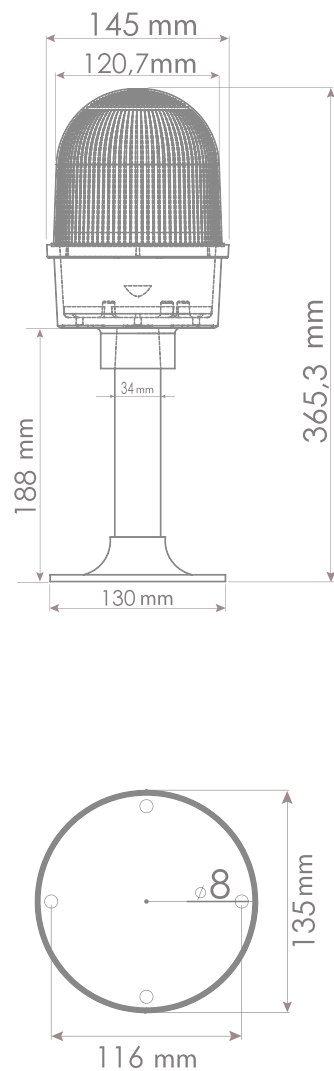

2

12V/DC - 24V/DC - 48V/DC

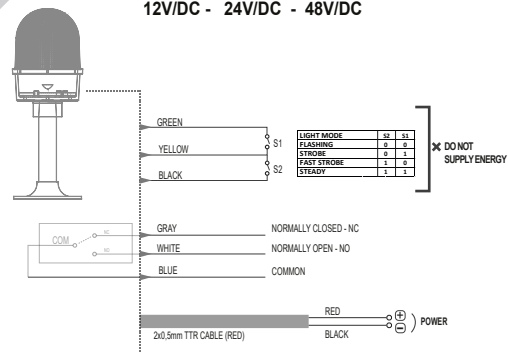


2a


- Do not energize for the contact cables except supply cables (2x0.50).
- By perceiving the level of light becomes active in the dark, becomes deactive in the daylight.
- It does not take account of the temporary loss of light throughout 30 sec. and it abolishes the light illusion.
- In light loss and electricity interruption over 30%, normally open, normally closed relay output.
- Visibility from 10km.

2


85-250V AC/DC

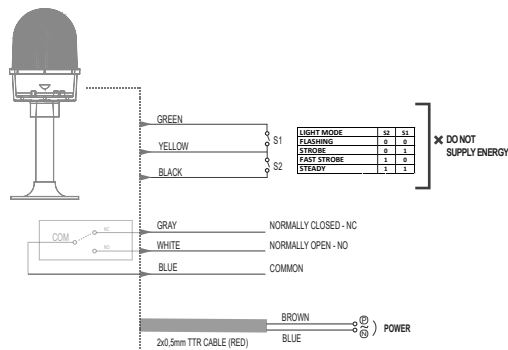


- Yellow-Black / Fast Strobe
- Yellow-Green / Strobe
- Yellow-Black-Green / Steady
- No cable contact is required for flasher light mode.





SPARE PARTS



TERMSP0700



TERMSP0100R (RED)
TERMSP0100G (GREEN)
TERMSP0100Y (YELLOW)
TERMSP0100B (BLUE)
TERMSP0100W (WHITE)



TERMSP0401