





TERMBH03***




- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

INDOOR

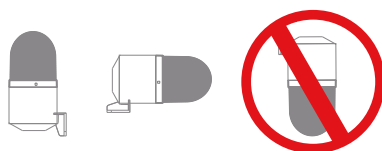

OUTDOOR

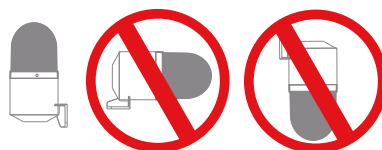

Model	Power Supply	Current (mA) Max.
TERMBH03***	12-24V AC/DC	102mA
TERMBH03***	40-250V AC/DC 50Hz	101mA

Melody	Sound Intensity (10cm) Min - Max	Sound Intensity (100cm) Min - Max
M1	126	105
M2	127	104
M3	129	108
M4	129	105
M5	126	107
M6	130	107
M7	128	103
M8	123	98

* Values may vary by +/- %5.

Model	Weight	Color
TERMBH03***	272gr	(1) Red (2) Green (3) Yellow
TERMBH03***	285gr	(4) Blue (5) White




It is recommended that people with epilepsy should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
 Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
 Tel. +39 039 9911011 - Fax +39 039 9910445
 E-mail: info@ter.it - www.ter.it
 Sede Legale - Registered Office
 Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

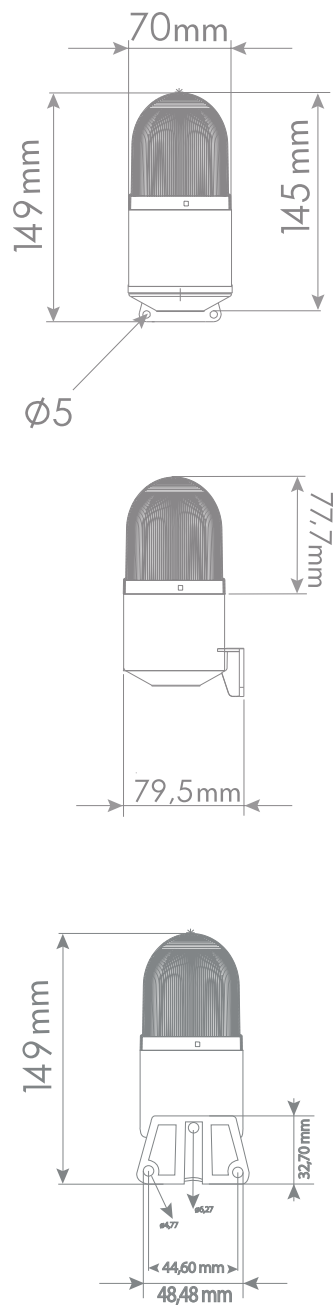

2

WIRING DIAGRAM


12-24V AC/DC

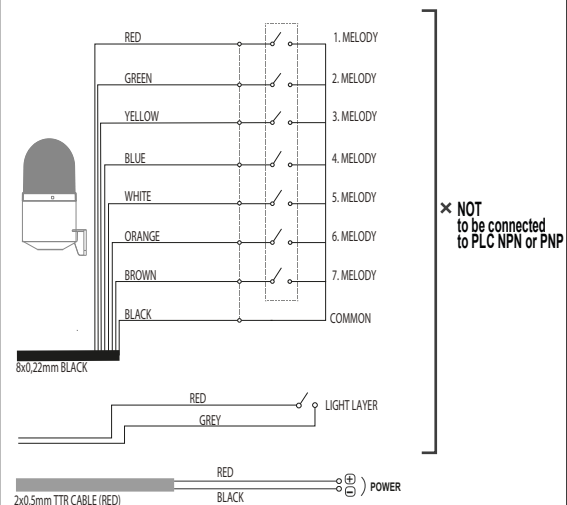

2

WIRING DIAGRAM

40-250V AC/DC

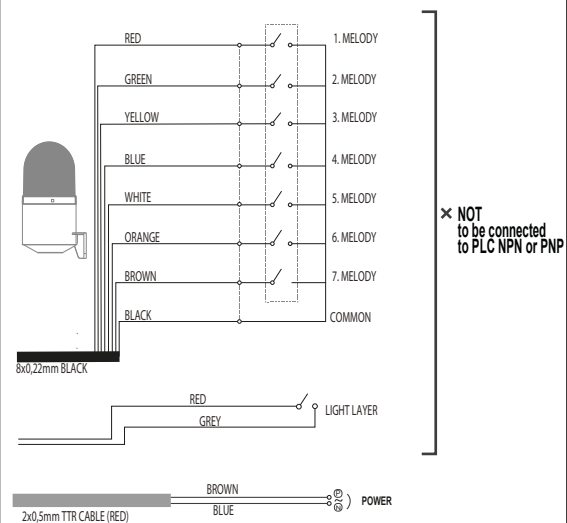

2a

WIRING INSTRUCTION



EN

Melody Wires: Red-Green-Yellow-Blue-White-Orange-Brown
Signal Wires: Black-Gray
Light Wires: Red
Power Supply Cable: 2x0.50 TTR (Red-Black for 12-24V AC/DC and Blue-Brown for 40-250V AC/DC)


- Do not supply power to the Melody, Signal, and Light Wires, and do not connect them to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Melody, Signal and Light Wires
- For melodies, make a dry contact connection between the Melody wires and the Black signal wire.
- For light, make a dry contact connection between the Light wires and the Gray signal wire.



- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.

3

SPARE PARTS



TERMSPO103R (RED)
 TERMSPO103G (GREEN)
 TERMSPO103Y (YELLOW)
 TERMSPO103B (BLUE)
 TERMSPO103W (WHITE)