






TERMOL0400\*  
TERMOL0401\*  
TERMOL0402\*  
TERMOL0403\*

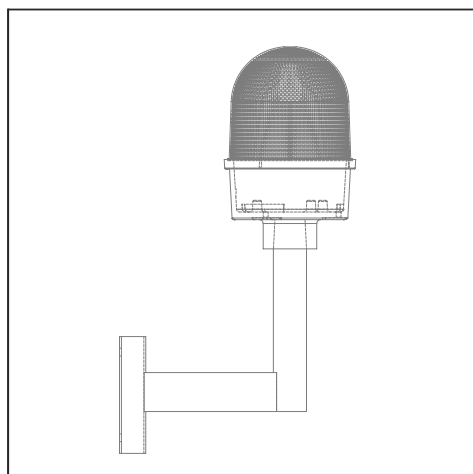

Low-intensity B Type Obstruction Lights  
manufactured in compliance  
with International Civil Aviation Organization  
(ICAO), Aerodromes, Annex 14, Volume 1,  
Photometry - Paragraph. 6.2.1.2 Table 6-1 and  
Table 6-2, Chromaticity - Appendix 1Sec. 2.3.1



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

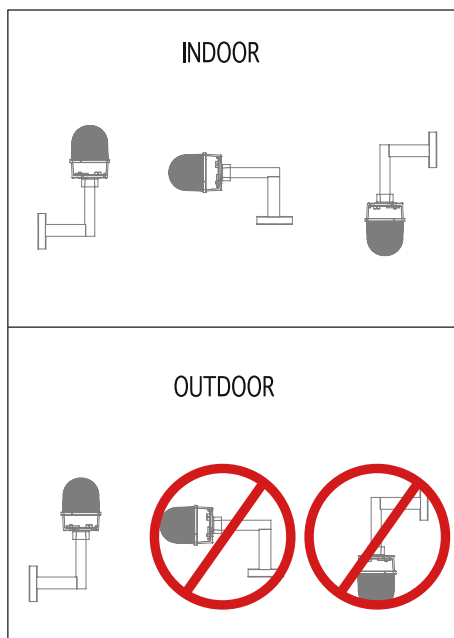

Model	Power Supply	Current (mA) Max.
TERMOL0400***	12V/DC	595mA
TERMOL0401***	24V/DC	265mA
TERMOL0402***	48V/DC	200mA
TERMOL0403***	85-250V AC/DC 50Hz	40mA

\* Values may vary by +/- %5.

Model	Weight	Color
TERMOL0400***	2515gr	(1) Red (2) Green (3) Yellow (4) Blue (5) White
TERMOL0401***	2515gr	
TERMOL0402***	2539gr	
TERMOL0403***	2947gr	





It is recommended that people with epilepsy should not use it.



**T.E.R. Tecno Elettrica Ravasi Srl a socio unico**  
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy  
Tel. +39 039 9911011 - Fax +39 039 9910445  
E-mail: [info@ter.it](mailto:info@ter.it) - [www.ter.it](http://www.ter.it)  
Sede Legale - Registered Office  
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy


1

## DIMENSIONS

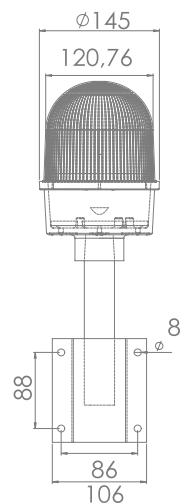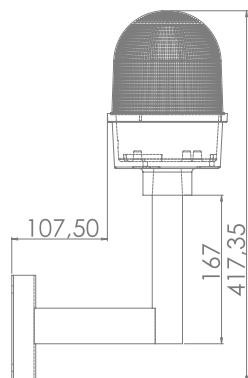

2

12V/DC - 24V/DC - 48V/DC

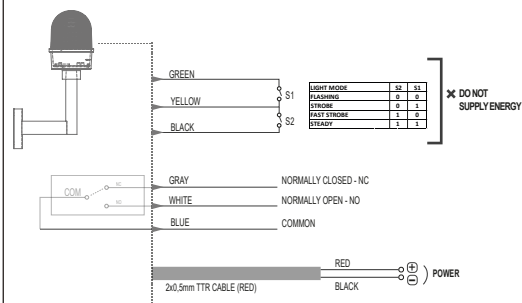


2a


- Do not energize for the contact cables except supply cables (2x0.50).
- By perceiving the level of light becomes active in the dark, becomes deactive in the daylight.
- It does not take account of the temporary loss of light throughout 30 sec. and it abolishes the light illusion.
- In light loss and electricity interruption over 30%, normally open, normally closed relay output.
- Visibility from 10 km.

2


85-250V AC/DC

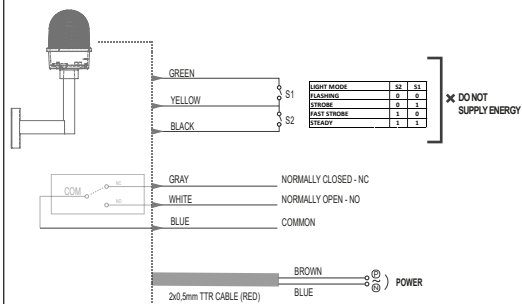


- Yellow-Black / Fast Strobe
- Yellow-Green / Strobe
- Yellow-Black-Green / Steady
- No cable contact is required for flasher light mode.





## SPARE PARTS



TERMSPO700



TERMSPO100R (RED)  
TERMSPO100G (GREEN)  
TERMSPO100Y (YELLOW)  
TERMSPO100B (BLUE)  
TERMSPO100W (WHITE)



TERMSPO400