





TERMES03\*\*\*

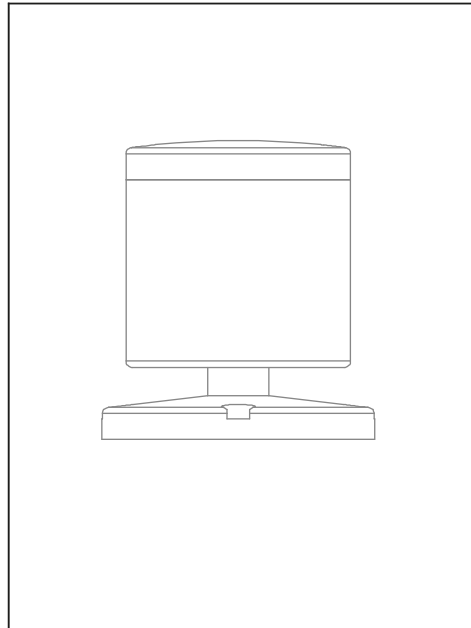

- Electrical connection must be carried out at least by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

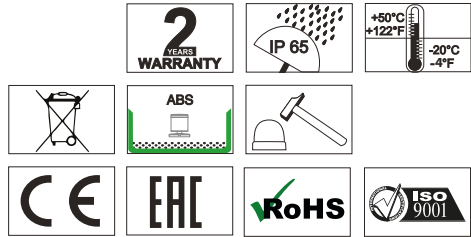

Model	Power Supply	Current (mA) Max.
TERMES0300	12-24V AC/DC	100mA
TERMES0301	24V/DC	94mA
TERMES0302	40-250V AC/DC	17mA
TERMES0303	220V AC	20mA

Melody	Sound Intensity (10cm) Min - Max	Sound Intensity (100cm) Min - Max
M1	98-115	82-100
M2	94-115	81-97

\* Values may vary by +/- %5.

Model	Weight
TERMES0300	145gr
TERMES0301	133gr
TERMES0302	170gr
TERMES0303	163gr






It is recommended that people with epilepsy should not use it.




**T.E.R. Tecno Elettrica Ravasi Srl a socio unico**  
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy  
Tel. +39 039 9911011 - Fax +39 039 9910445  
E-mail: [info@ter.it](mailto:info@ter.it) - [www.ter.it](http://www.ter.it)  
Sede Legale - Registered Office  
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


## TECHNICAL DIAGRAM

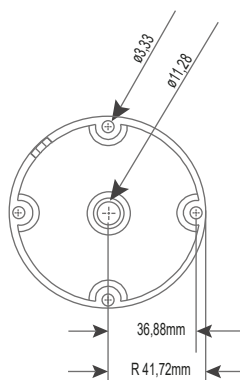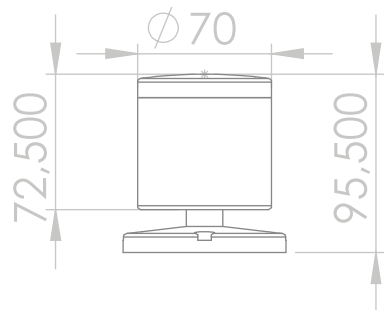


2

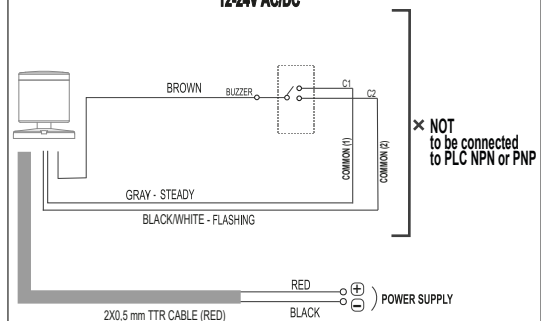WIRING DIAGRAM  
12-24V AC/DC

2

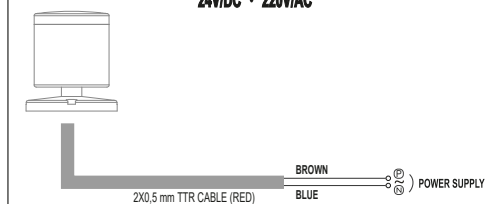WIRING DIAGRAM  
24VDC • 220VAC

2

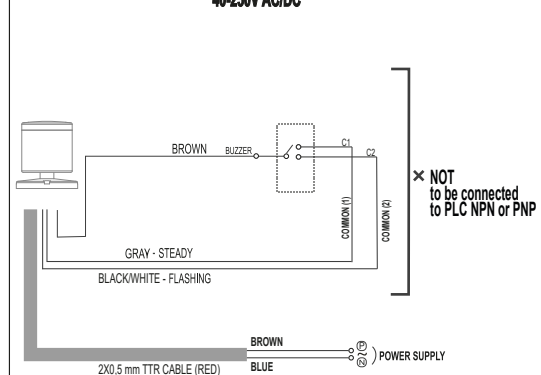WIRING DIAGRAM  
40-250V AC/DC

2a

## WIRING INSTRUCTION



(EN)

**Buzzer Wires:** Brown  
**Signal Wires:** Gray and Black-White  
**Power Supply Cable:** 2x0,50 TTR (Red-Black for 12-24v ac/dc and Blue-Brown for 40-250v ac/dc)

- 12-24V AC/DC and 40-250V AC/DC series products are fed stably via the motherboard.
- Do not supply power to the Buzzer and Signal Wires or not be connected to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Buzzer and Signal Wires.
- For Steady Buzzer, make a dry contact connection with the Gray signal wire.
- For Flashing Buzzer, make a dry contact connection with the Black-White signal wire.

## SPARE PARTS

