





TERMHD0300
TERMHD0301
TERMHD0302



- Electrical connection must be carried out at least by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.



Model	Power Supply	Current (mA) Max.
TERMHD0300	12-30V/DC	476mA
TERMHD0301	48V/DC	172mA
TERMHD0302	85-250V AC/DC 50Hz	101mA

Sound Intensity


Melody	Cable Color	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
1	Red	123	113
2	Green	128	112
3	Yellow	130	109
4	Blue	127	113
5	White	123	107
6	Orange	128	113
7	Brown	128	119
8	Misuse	126	117

* Values may vary by +/- %5.


Model	Weight
TERMHD0300	2308gr
TERMHD0301	2308gr
TERMHD0302	2358gr




It is recommended that people with epilepsy should not use it.

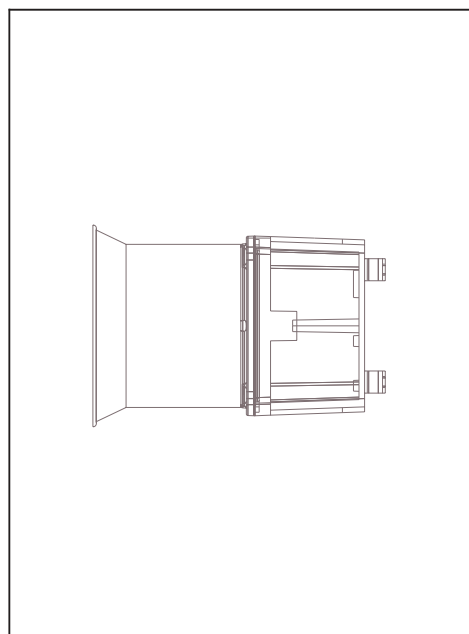

INDOOR




OUTDOOR



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

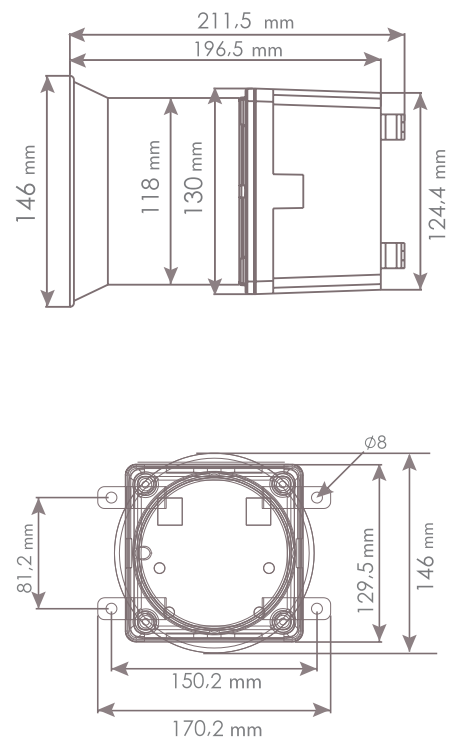

2

WIRING DIAGRAM

12-30V/DC - 48V/DC

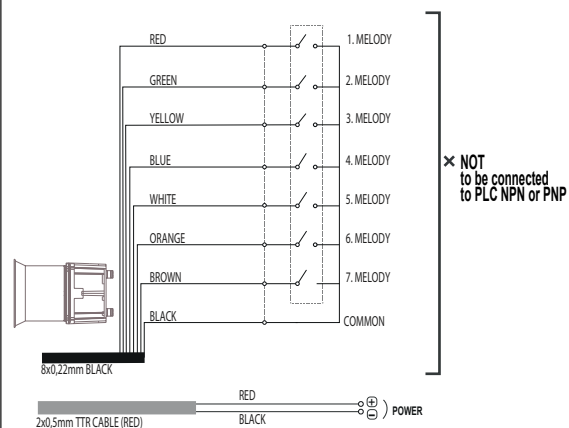

2a

WIRING INSTRUCTION



EN

Melody Wires: Red-Green-Yellow-Blue-White-Orange-Brown
Signal Wires: Black
Power Supply Cable: 2x0.50 TTR
 (Red-Black for 12-24V AC/DC and 48V DC
 Blue-Brown for 40-250V AC/DC)

- Do not supply power to the Melody and Signal Wires, and do not connect them to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Melody and Signal Wires.
- For melodies, make a dry contact connection between the Melody wires and the Black signal wire.
- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.

2

WIRING DIAGRAM

85-250V AC/DC

