


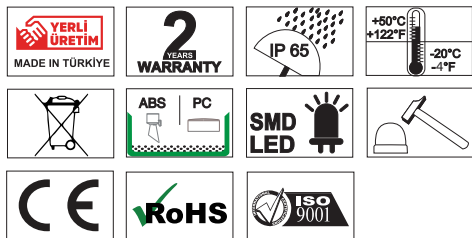


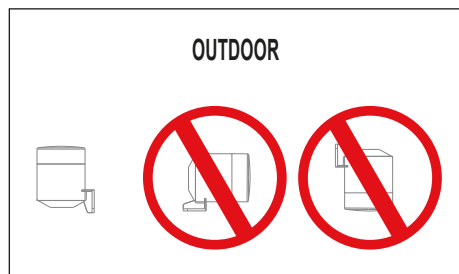

TERMBH0200*
TERMBH0201*

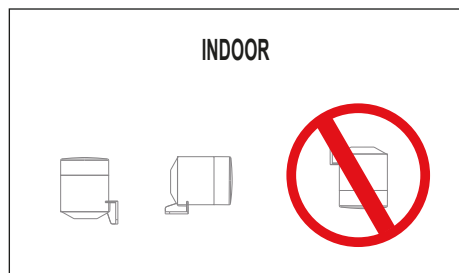

- EN
- Electrical connection is to be made by trained electrical specialists only.
 - The product can be used indoors & outdoors.
 - The interior & exterior compatibility of the product is like in the pictures below.
 - The product should be installed where the vibration and heat is minimum.

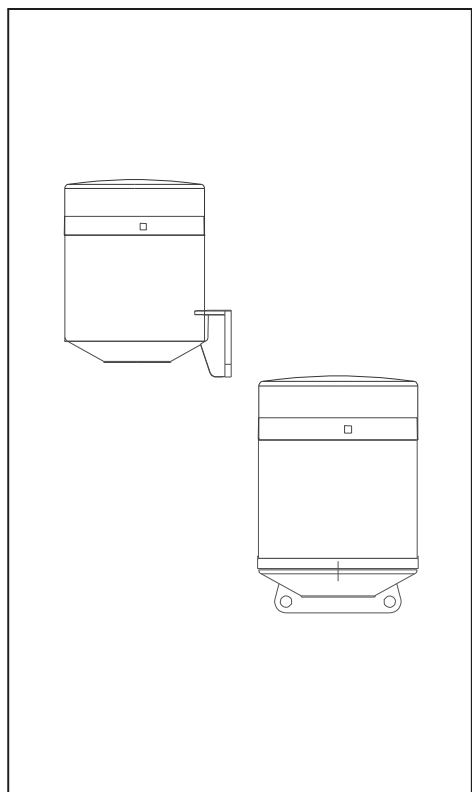

TERMBH02*** Model		
P/N	Power Supply	Current (mA) Max.
TERMBH0200***	12-24V AC/DC	250mA
TERMBH0201***	40-250V AC/DC 50Hz	50mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White

Light Pattern		
P/N	Light Pattern	Melody
TERMBH02***	Flashing Slow Flashing Strobe Fast Strobe Steady	16

Sound Intensity		
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	98-121	84-107
M2	97-121	83-109
M3	96-115	78-93
M4	94-118	78-98
M5	96-120	76-101
M6	100-121	80-102
M7	92-115	76-97
M8	97-122	84-110
M9	94-117	79-103
M10	94-118	77-95
M11	97-120	78-100
M12	102-123	81-107
M13	96-118	78-99
M14	96-118	79-100
M15	99-122	78-99
M16	96-119	79-101

***Values may vary by +/- 5%.

Weight		
Model	Weight	Color
TERMBH0200***	175-185 gr	Red Green Blue Yellow White
TERMBH0201***	195-205 gr	






*It is recommended that people with epilepsy should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

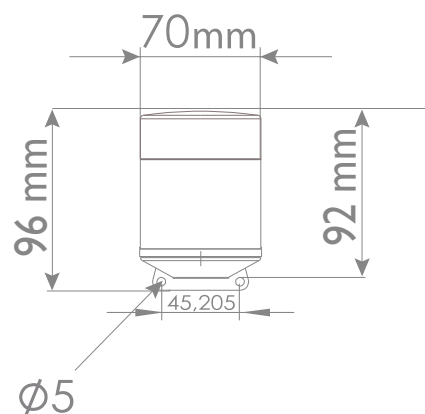

2

WIRING DIAGRAM


12-24V AC/DC

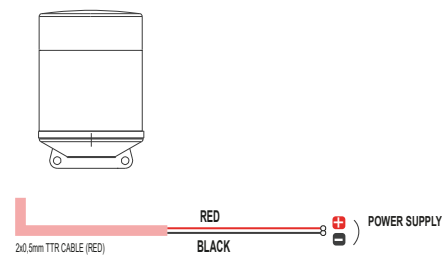

2


WIRING DIAGRAM

40-250V AC/DC

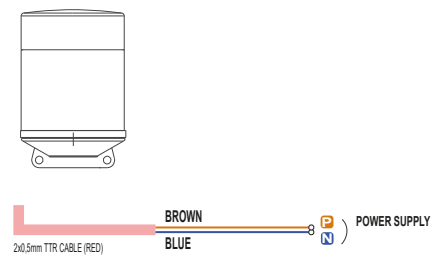

3

MELODY AND SOUND INTENSITY ADJUSTMENT

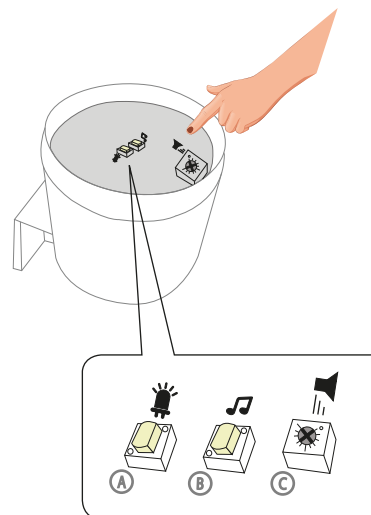

A



To change the light mode, press and release the light button.

B



To change the melody, press and release the melody button.

C



Adjusting the sound level with potentiometer.

4

SPARE PARTS



TERMSPO106R (RED)
TERMSPO106G (GREEN)
TERMSPO106Y (YELLOW)
TERMSPO106B (BLUE)
TERMSPO106W (WHITE)

