





TERMHD0500
TERMHD0501
TERMHD0502



- Electrical connection must be carried out at least by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.



Model	Power Supply	Current (mA) Max.
TERMHD0500	12-30V/DC	473mA
TERMHD0501	48V/DC	183mA
TERMHD0502	85-250V AC/DC 50Hz	95mA


Sound Intensity			
Melody	Cable Color	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
1	Red	127	121
2	Green	121	110
3	Yellow	118	107
4	Blue	126	117
5	White	120	105
6	Orange	122	110
7	Brown	126	117
8	Misuse	123	115

* Values may vary by +/- %5.


Model	Ağırlık / Weight
TERMHD0500	2217gr
TERMHD0501	2217gr
TERMHD0502	2265gr




Epilepsi hastalığı olanların kullanmaması önerilir.
It is recommended that people with epilepsy should not use it.

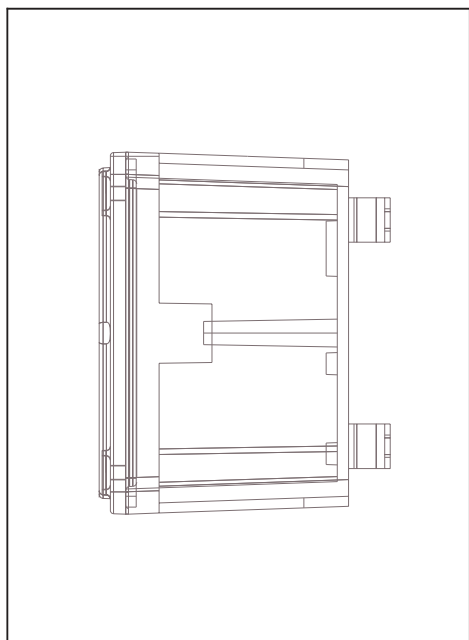

INDOOR




OUTDOOR



T.E.R. Tecnica Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

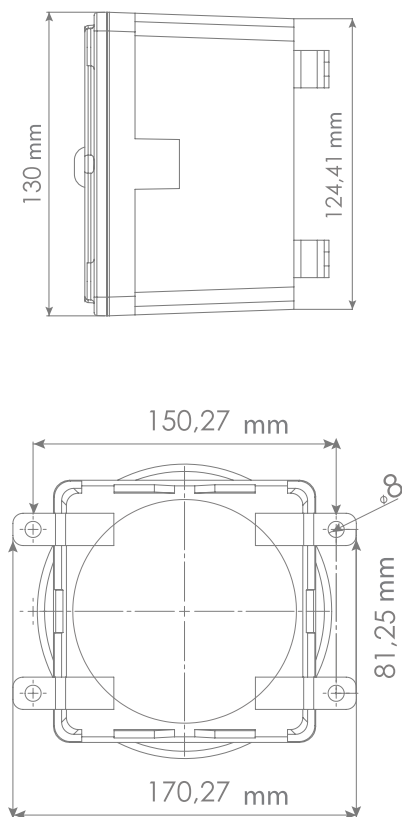

2

WIRING DIAGRAM

12-30V/DC - 48V/DC

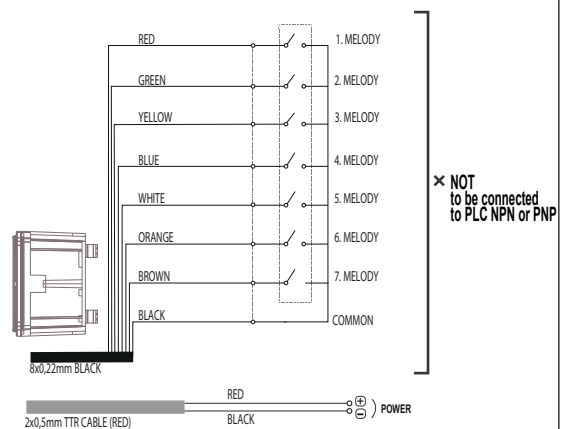

2a

WIRING INSTRUCTION



(EN)

Melody Wires: Red-Green-Yellow-Blue-White-Orange-Brown
Signal Wires: Black
Power Supply Cable: 2x0,50 TTR
 (Red-Black for 12-24V AC/DC and 48V DC
 Blue-Brown for 40-250V AC/DC)

- Do not supply power to the Melody and Signal Wires, and do not connect them to any PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Melody and Signal Wires.
- For melodies, make a dry contact connection between the Melody wires and the Black signal wire.



- If 3 melodies are triggered at the same time, a 'Misuse' alarm will be activated.

2

WIRING DIAGRAM

85-250V AC/DC

