





TERMSB01***



(EN)

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

INDOOR



OUTDOOR



TERMSB01 Model

P/N	Power Supply	Current (mA) Max.
TERMSB01***	24V /DC	110mA - 150mA
TERMSB01***	40-250V AC/DC	78mA - 95mA

R G Y B W

*** Indicates Light colors.

R-Red / G-Green / Y-Yellow / B-Blue / W-White



Light Pattern

P/N	Light Pattern	Melody
TERMSB0100*** TERMSB0101***	Steady	X
TERMSB0102*** TERMSB0103***	Flashing	X
TERMSB0104*** TERMSB0105***	Steady	Continuous
TERMSB0106*** TERMSB0107***	Flashing	Intermittent



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	100	90

***Values may vary by +/- 5%.




Weight

P/N	Weight	Color
TERMSB01***	145-155 gr	Red Green Yellow Blue White



*It is recommended that people with epilepsy should not use it.

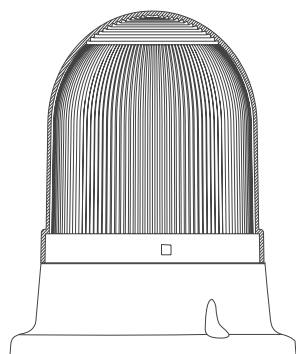

T.E.R. Tecno Elettrica Ravasi Srl a socio unico

Via Garibaldi 29/31 - 23885 Calco (LC) - Italy

Tel. +39 039 9911011 - Fax +39 039 9910445


E-mail: info@ter.it - www.ter.it

Sede Legale - Registered Office

Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

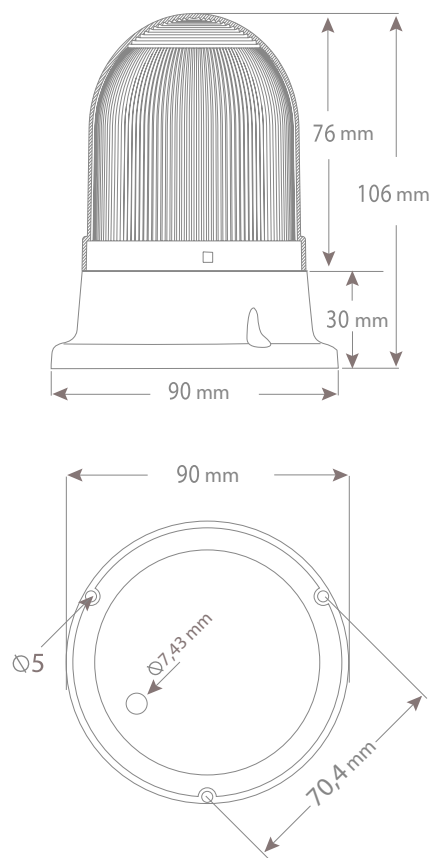

2

WIRING DIAGRAM


24V DC

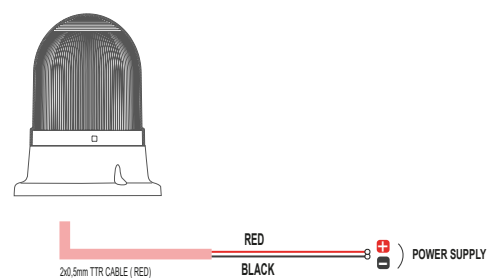

2

WIRING DIAGRAM


40-250V AC/DC

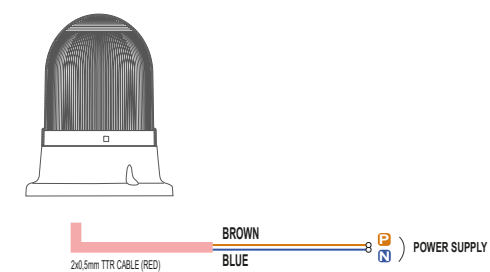

3



ATTENTION




(EN)



- For models with **40-250V AC/DC**, do not open the lens cover and avoid touching the product board while the device is powered.

4

SPARE PARTS



TERMSP0103R (RED)
 TERMSP0103G (GREEN)
 TERMSP0103Y (YELLOW)
 TERMSP0103B (BLUE)
 TERMSP0103W (WHITE)



TERMSP0603