




TERMSB0508***
TERMSB0509***
TERMSB0510***
TERMSB0511***
TERMSB0512***
TERMSB0513***
TERMSB0514***
TERMSB0515***

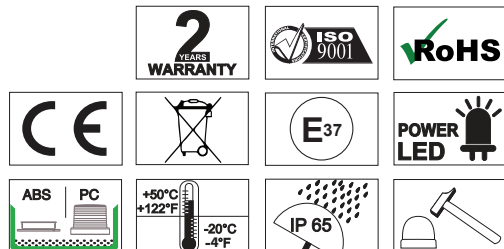



- Electrical connection must only be carried out by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

Model	Power Supply	Current(mA)Max.
TERMSB05***	12-24V AC/DC	447mA - 531mA
TERMSB05***	85-250V AC/DC	41mA - 58mA

Model	Weight	Color
TERMSB05***	278gr - 295gr	(1) Red (1) Green (1) Yellow (1) Blue (1) White
TERMSB05***	337gr - 349gr	



It is recommended that people with epilepsy should not use it.

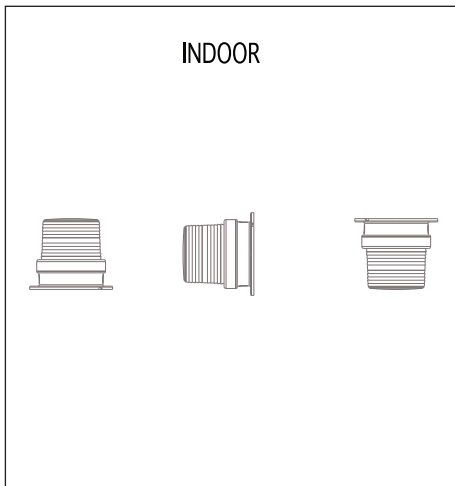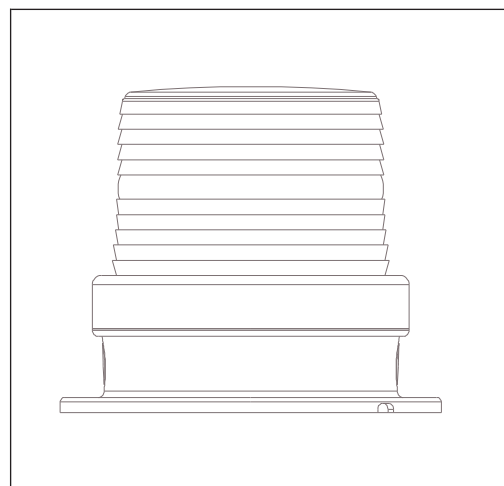

Melody	Sound Intensity(dB) (10cm) Min - Max	Sound Intensity(dB)(1m) Min - Max
M1	96-110	83-97
M2	94-109	77-96
M3	93-103	76-85
M4	90-104	74-85
M5	92-106	74-88
M6	93-110	79-94
M7	85-104	68-87
M8	94-110	79-96
M9	90-110	75-94
M10	88-103	74-92
M11	0	0


* Values may vary by +/- %5.




T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1

DIMENSIONS

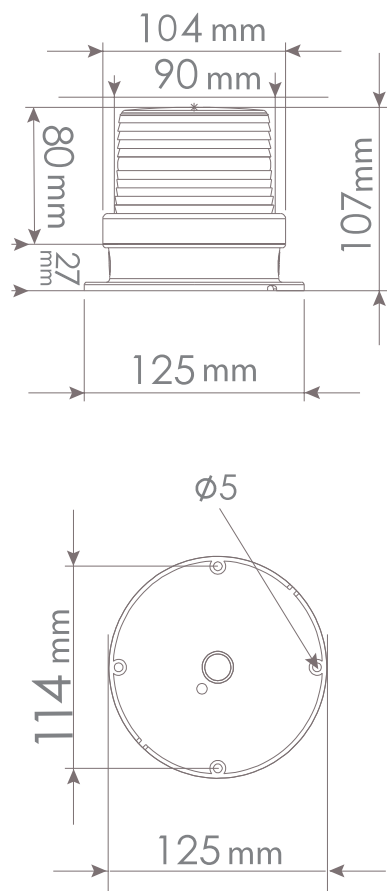


2

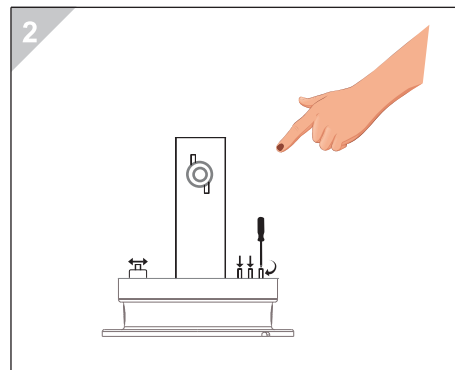


3

12-24V AC/DC

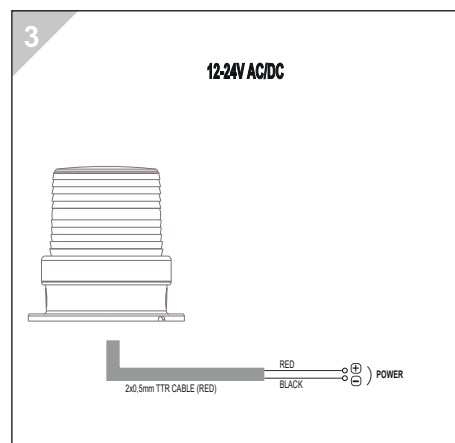

4


85-250V AC/DC

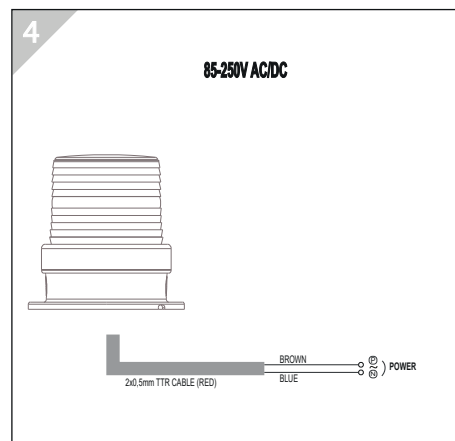


2a

- 🎵 To change the melodies, press and release the melody button.
- 💡 To change the light mode, press and release the light button.
- 📶 Potentiometer mode is active.
- 🔊 Gradual sound mode is active.(The sound level rises gradually.)
- VOLUME Adjusting the sound level with potentiometer.


SPARE PARTS



TERMSP0702



TERMSP0102R (RED)
 TERMSP0102G (GREEN)
 TERMSP0102Y (YELLOW)
 TERMSP0102B (BLUE)
 TERMSP0102W (WHITE)



TERMSP0602