





TERMSB05***



TERMSB05 Model

P/N	Power Supply	Current (mA) Max.
TERMSB05***	12-24V AC/DC	140-144mA
TERMSB05***	85-250V AC/DC	240-330mA

R G Y B W

*** Indicates Light colors.

R-Red / G-Green / Y-Yellow / B-Blue / W-White



Light Pattern

P/N	Light Pattern	Melody
TERMSB0500*** TERMSB0501*** TERMSB0504*** TERMSB0505***	Steady Flashing Right-Left Strobe Strobe	X
TERMSB0502*** TERMSB0503*** TERMSB0506*** TERMSB0507***	Slow Flashing Rotary Slow Rotary	10



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	87-95	73-81
M2	66-97	65-84
M3	85-97	79-88
M4	95-103	80-91
M5	77-94	70-87
M6	95-105	84-97
M7	90-99	80-91
M8	95-100	75-82
M9	103-105	88-94
M10	65-102	59-96

***Values may vary by +/- 5%.




Weight

P/N	Weight	Color
TERMSB05***	288-298gr	Red Green Yellow Blue White
TERMSB05***	314-333gr	



*It is recommended that people with epilepsy should not use it.

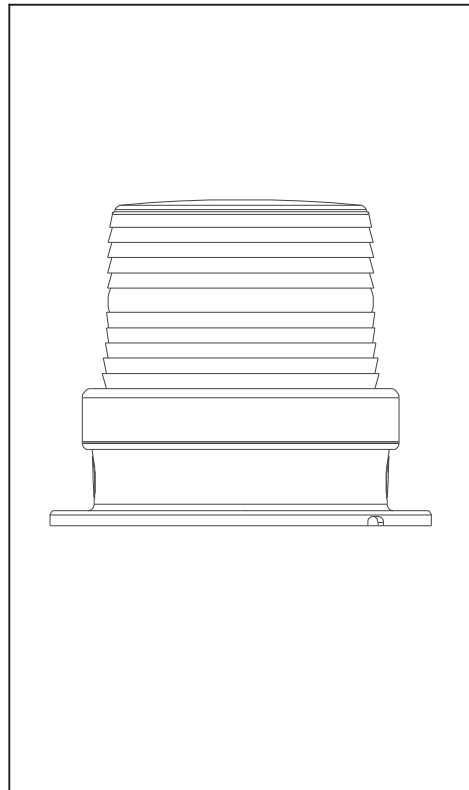

(EN)

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

INDOOR





OUTDOOR



T.E.R. Tecnica Elettrica Ravasi Srl a socio unico
 Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
 Tel. +39 039 9911011 - Fax +39 039 9910445
 E-mail: info@ter.it - www.ter.it
 Sede Legale - Registered Office
 Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

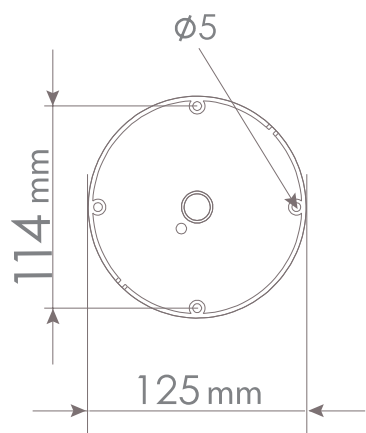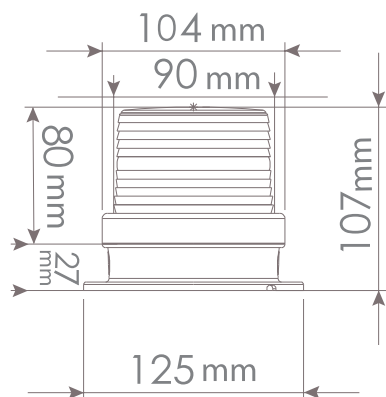

2

WIRING DIAGRAM


12-24V AC/DC



2



WIRING DIAGRAM

85-250V AC/DC



3

LIGHT&MELODY ADJUSTMENT

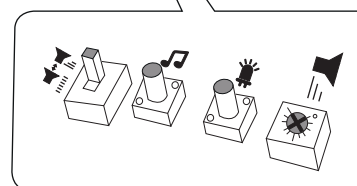

EN



The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.



The sound level increases gradually.



To change melodies, press and release the melody button.




To change the light mode, press and release the light button.




The sound level can be adjusted using the potentiometer.

4



SPARE PARTS



TERMSP0702



TERMSP0102R (RED)
TERMSP0102G (GREEN)
TERMSP0102Y (YELLOW)
TERMSP0102B (BLUE)
TERMSP0102W (WHITE)



TERMSP0602