





TERMSB06***



EN

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.



TERMSB06 Model

P/N	Power Supply	Current (mA) Max.
TERMSB06***	12-24V AC/DC	140-144mA
TERMSB06***	85-250V AC/DC	330-240mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White




Weight

P/N	Weight	Color
TERMSB06***	335-355gr	Red Green Yellow Blue White
TERMSB06***	390-415gr	



*It is recommended that people with epilepsy should not use it.

INDOOR



OUTDOOR



Light Pattern

P/N	Light Pattern	Melody
TERMSB0600*** TERMSB0601*** TERMSB0604*** TERMSB0605***	Steady Flashing Right-Left Strobe Strobe	X
TERMSB0602*** TERMSB0603*** TERMSB0606*** TERMSB0607***	Slow Flashing Rotary Slow Rotary	10



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	93-110	83-105
M2	88-110	82-102
M3	97-108	83-95
M4	95-104	78-90
M5	102-114	90-100
M6	99-111	84-97
M7	95-112	82-93
M8	96-108	76-98
M9	93-112	80-98
M10	95-107	79-96



***Values may vary by +/- 5%.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

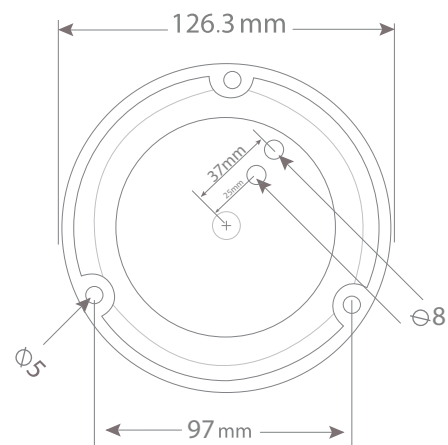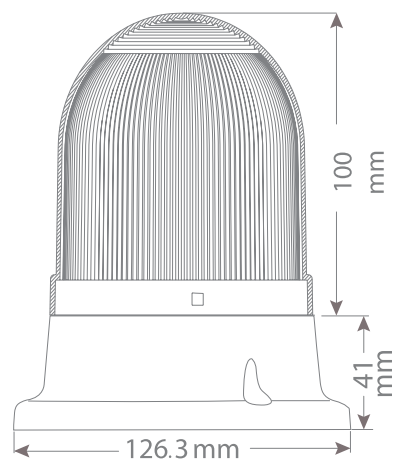

2

WIRING DIAGRAM


12-24V AC/DC



2


WIRING DIAGRAM

85-250V AC/DC



3

LIGHT&MELODY ADJUSTMENT

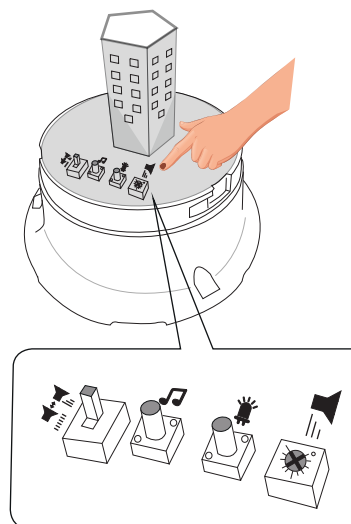

EN

The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.

The sound level increases gradually.


To change melodies, press and release the melody button.

To change the light mode, press and release the light button.


The sound level can be adjusted using the potentiometer.

4


SPARE PARTS



TERMSP0701

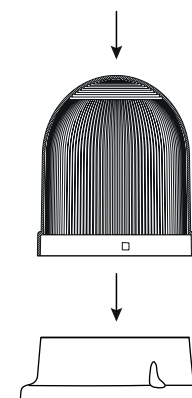

TERMSP0101R (RED)
TERMSP0101G (GREEN)
TERMSP0101Y (YELLOW)
TERMSP0101B (BLUE)
TERMSP0101W (WHITE)



TERMSP0601