





TERMSB06***



EN

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.



TERMSB06 Model

P/N	Power Supply	Current (mA) Max.
TERMSB06***	12-24V AC/DC	447-531mA
TERMSB06***	85-250V AC/DC	41-58mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White




Weight

P/N	Weight	Color
TERMSB06***	290-315gr	Red Green Yellow Blue White
TERMSB06***	340-360gr	



*It is recommended that people with epilepsi should not use it.

INDOOR



OUTDOOR



Light Pattern

P/N	Light Pattern	Melody
TERMSB0608*** TERMSB0609*** TERMSB0612*** TERMSB0613***	Steady Flashing Right-Left Strobe Strobe	X
TERMSB0610*** TERMSB0611*** TERMSB0614*** TERMSB0615***	Slow Flashing Rotary Slow Rotary	10



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	93-110	83-105
M2	88-110	82-102
M3	97-108	83-95
M4	95-104	78-90
M5	102-114	90-100
M6	99-111	84-97
M7	95-112	82-93
M8	96-108	76-98
M9	93-112	80-98
M10	95-107	79-96



***Values may vary by +/- 5%.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

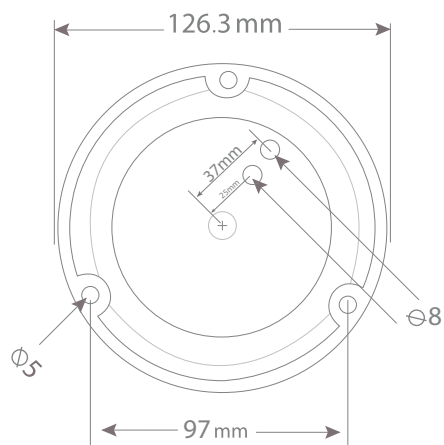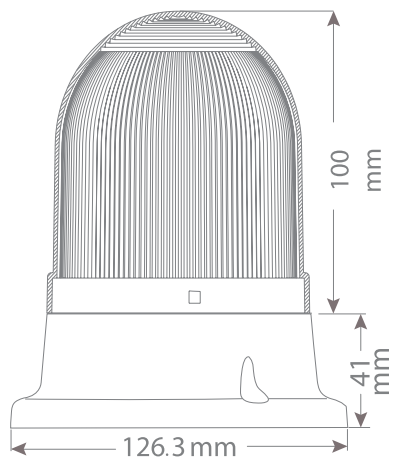

2

WIRING DIAGRAM


12-24V AC/DC



2


WIRING DIAGRAM

85-250V AC/DC



3

LIGHT&MELODY ADJUSTMENT

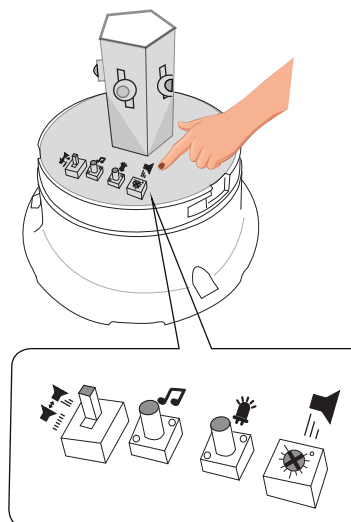


EN


- The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.
- The sound level increases gradually.
- To change melodies, press and release the melody button.
- To change the light mode, press and release the light button.
- The sound level can be adjusted using the potentiometer.

4

SPARE PARTS



TERMSP0701




TERMSP0101R (RED)

TERMSP0101G (GREEN)

TERMSP0101Y (YELLOW)

TERMSP0101B (BLUE)

TERMSP0101W (WHITE)



TERMSP0601