

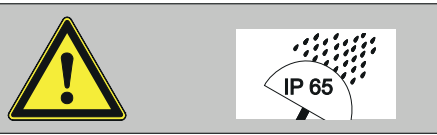






TERMSB07*** (POWER LED VERSION)



EN

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

INDOOR



OUTDOOR



TERMSB07*** Model

P/N	Power Supply	Current (mA) Max.
TERMSB07***	12-24V AC/DC	447-531mA
TERMSB07***	85-250V AC/DC	41-58mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White



Light Pattern

P/N	Light Pattern	Melody
TERMSB0700***	Steady	X
TERMSB0701***	Flashing	X
TERMSB0702***	Right-Left Strobe	10
TERMSB0703***	Strobe	10
	Slow Flashing	
	Rotary	
	Slow Rotary	



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	87-100	76-86
M2	83-98	73-86
M3	93-99	75-86
M4	92-103	74-82
M5	92-104	75-86
M6	89-103	76-87
M7	86-100	72-81
M8	90-100	74-84
M9	84-102	70-85
M10	91-103	75-85

***Values may vary by +/- 5%.

Weight		
P/N	Weight	Color
TERMSB07***	355-365gr	Red Green Yellow Blue White
TERMSB07***	415-425gr	





*It is recommended that people with epilepsi should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

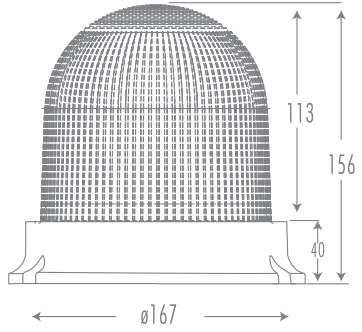

2

WIRING DIAGRAM


12-24V AC/DC



2


WIRING DIAGRAM

85-250V AC/DC



3

LIGHT&MELODY ADJUSTMENT

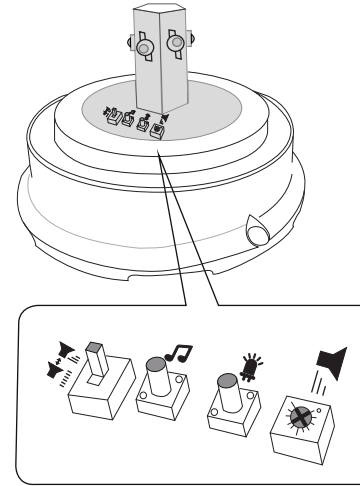

EN

The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.

The sound level increases gradually.


To change melodies, press and release the melody button.

To change the light mode, press and release the light button.



The sound level can be adjusted using the potentiometer.

4

SPARE PARTS



TERMSP0100R (RED)
TERMSP0100G (GREEN)
TERMSP0100Y (YELLOW)
TERMSP0100B (BLUE)
TERMSP0100W (WHITE)



TERMSP0600