





TERMSB10***



EN

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

INDOOR



OUTDOOR



TERMSB10 Model

P/N	Power Supply	Current (mA) Max.
TERMSB10***	12-24V AC/DC	447-531mA
TERMSB10***	85-250V AC/DC	41-58mA

R G Y B W

*** Indicates Light colors.

R-Red / G-Green / Y-Yellow / B-Blue / W-White



Light Pattern

P1	Flaşör / Flashing
P2	Çakar / Strobe



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	96-110	83-97
M2	94-109	77-96
M3	93-103	76-85
M4	90-104	74-85
M5	92-106	74-88
M6	93-110	79-94
M7	85-104	68-87
M8	94-110	76-96
M9	90-110	75-94

***Values may vary by +/- 5%.




Weight

P/N	Weight	Color
TERMSB10***	290-315gr	Red Green Yellow Blue White
TERMSB10***	340-360gr	





*It is recommended that people with epilepsi should not use it.

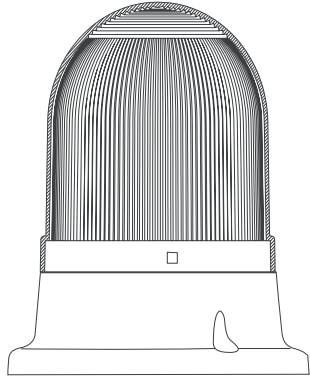

T.E.R. Tecno Elettrica Ravasi Srl a socio unico
 Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
 Tel. +39 039 9911011 - Fax +39 039 9910445
 E-mail: info@ter.it - www.ter.it
 Sede Legale - Registered Office
 Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

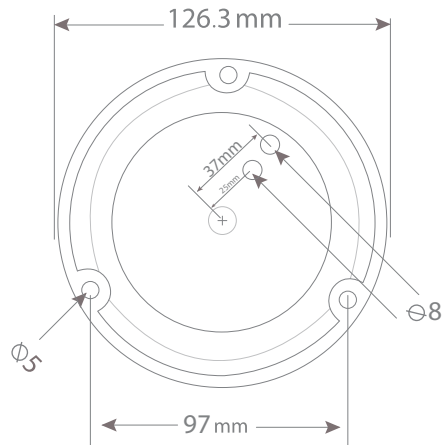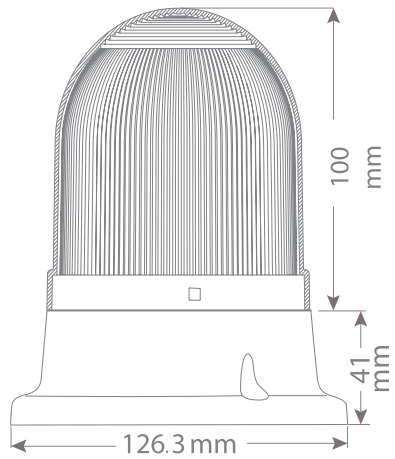


2

WIRING DIAGRAM

12-24V AC/DC



2

KABLO BAĞLANTI ŞEMASI
WIRING DIAGRAM
85-250V AC/DC

3

LIGHT LEVEL DETECTION





EN

- Light Level Detection (Produced with Photocell):
The device is equipped with a photocell that detects light levels, activating in darkness and deactivating in brightness.

3

LIGHT&MELODY ADJUSTMENT

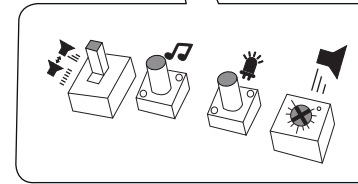


EN


- The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.
- The sound level increases gradually.
- To change melodies, press and release the melody button.
- To change the light mode, press and release the light button.
- The sound level can be adjusted using the potentiometer.

4


SPARE PARTS



TERMSP0701



TERMSP0101R (RED)
TERMSP0101G (GREEN)
TERMSP0101Y (YELLOW)
TERMSP0101B (BLUE)
TERMSP0101W (WHITE)



TERMSP0601