






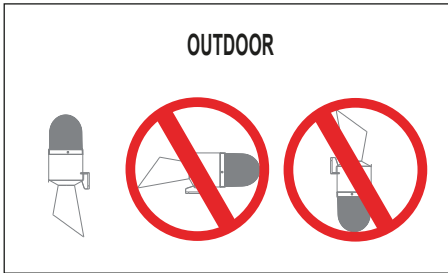

TERMWH0100***
TERMWH0101***

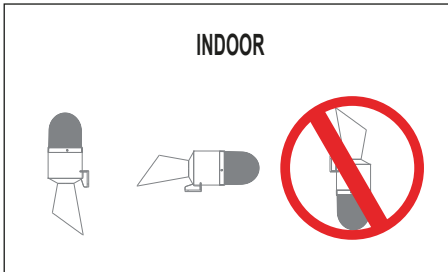

- (EN)
- Electrical connection is to be made by trained electrical specialists only.
 - The product can be used indoors & outdoors.
 - The interior & exterior compatibility of the product is like in the pictures below.
 - The product should be installed where the vibration and heat is minimum.

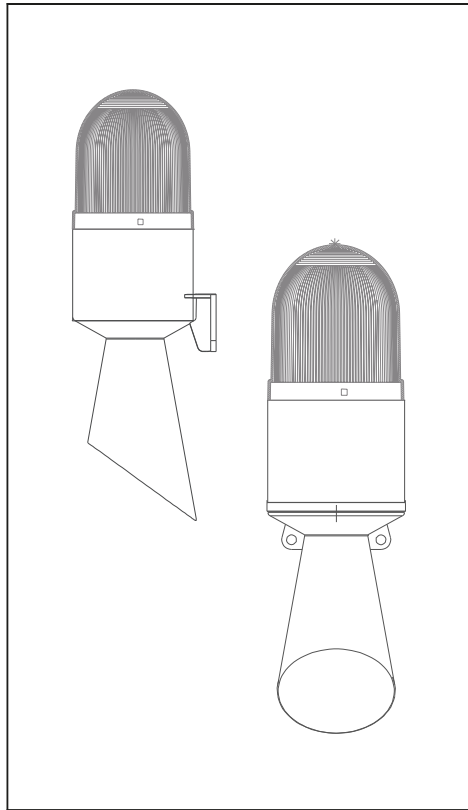

TERMWH01 Model		
P/N	Power Supply	Current (mA) Max.
TERMWH0100***	12-24V AC/DC	250mA
TERMWH0101***	40-250V AC/DC 50Hz	50mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White

Light Pattern		
P/N	Light Pattern	Melody
TERMWH01***	Flashing Slow Flashing Strobe Fast Strobe Steady	16

Sound Intensity		
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	107-130	93-112
M2	115-130	94-111
M3	121-125	98-106
M4	121-129	103-110
M5	122-129	100-110
M6	121-131	97-111
M7	117-123	92-105
M8	120-129	102-110
M9	117-129	93-109
M10	121-129	102-110
M11	108-127	89-108
M12	111-129	92-113
M13	109-126	87-105
M14	108-126	88-105
M15	109-126	88-105
M16	110-126	87-103

***Values may vary by +/- 5%.

Weight		
Model	Weight	Color
TERMWH0100***	210-220 gr	Red Green Yellow Blue White
TERMWH0101***	225-235 gr	






*It is recommended that people with epilepsy should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

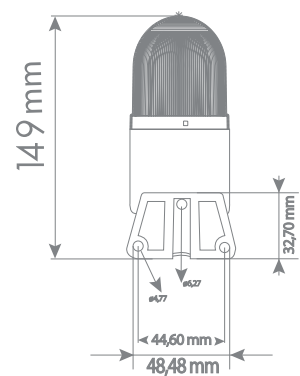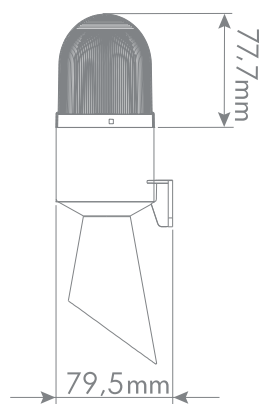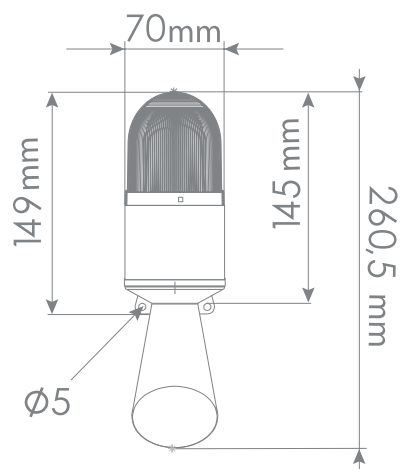

2

WIRING DIAGRAM


12-24V AC/DC

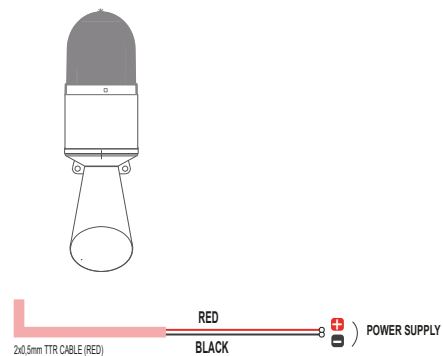

2


WIRING DIAGRAM

40-250V AC/DC

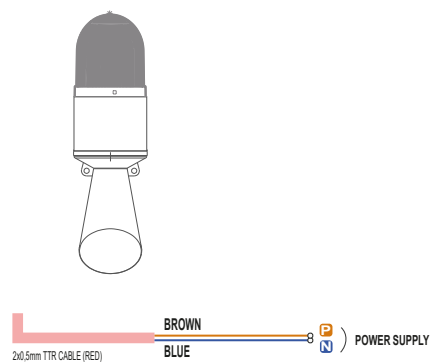

3

MELODY AND SOUND INTENSITY ADJUSTMENT

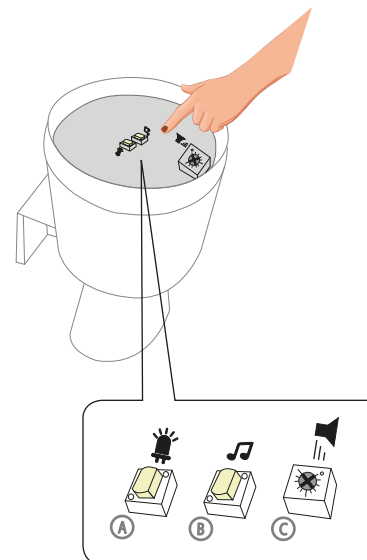

A



To change the light mode, press and release the light button.

B



To change the melody, press and release the melody button.


C



Adjusting the sound level with potentiometer.

4

SPARE PARTS



TERMSP0103R (RED)
 TERMSP0103G (GREEN)
 TERMSP0103Y (YELLOW)
 TERMSP0103B (BLUE)
 TERMSP0103W (WHITE)

