

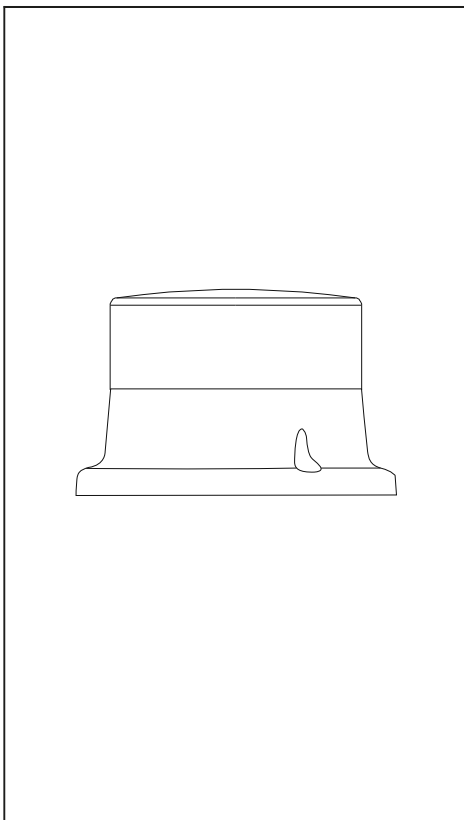





TERMWL0400  
TERMWL0401



(EN)

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.

INDOOR



OUTDOOR



#### TERMWL04 Model

P/N	Power Supply	Current (mA) Max.
TERMWL0400	12-24V /DC	140mA
TERMWL0401	12-24V /DC	190mA



#### Light Pattern

P/N	Light Pattern	Melody
TERMWL0400	Flashing Strobe	X
TERMWL0401	Slow Flashing Steady	16



#### Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	85-93	71-79
M2	83-91	68-80
M3	80-96	66-82
M4	83-90	78-83
M5	84-95	73-84
M6	87-95	74-82
M7	84-97	74-88
M8	88-99	71-87
M9	84-97	73-85
M10	87-95	72-84
M11	85-96	73-82
M12	93-103	81-88
M13	92-100	78-87
M14	87-99	77-86
M15	90-100	77-86
M16	87-99	81-87

\*\*\* Values may vary by +/- 5%.



#### Weight

P/N	Weight	Color
TERMWL0400	240-250gr	Red Green Blue Yellow
TERMWL0401	250-260gr	





\*It is recommended that people with epilepsi should not use it.



**T.E.R. Tecno Elettrica Ravasi Srl a socio unico**  
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy  
Tel. +39 039 9911011 - Fax +39 039 9910445  
E-mail: info@ter.it - www.ter.it  
Sede Legale - Registered Office  
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


## TECHNICAL DIAGRAM

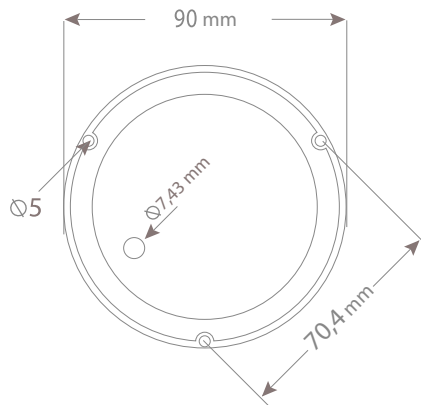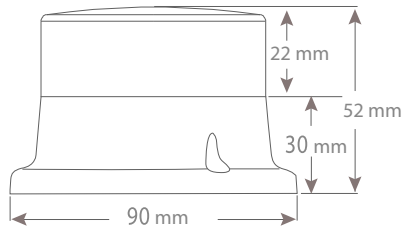

2

## WIRING DIAGRAM

12-24V DC

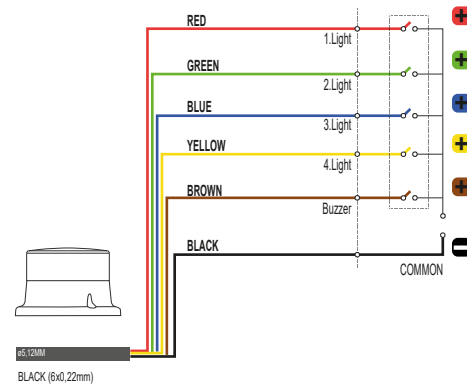

2a



## WIRING INSTRUCTION

12-24V DC


(EN)

**Light Wires:** Red-Green-Blue-Yellow  
**Buzzer Wire:** Brown  
**Common Wire:** Black

- The 12-24V DC RGB series products are current-protected.
- The Melody and Buzzer wires can be connected to the NPN/PNP terminals of a PLC.
- When the cable specified is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order: **Red, Green, Blue, Yellow.**

3

## LIGHT&amp;MELODY ADJUSTMENT

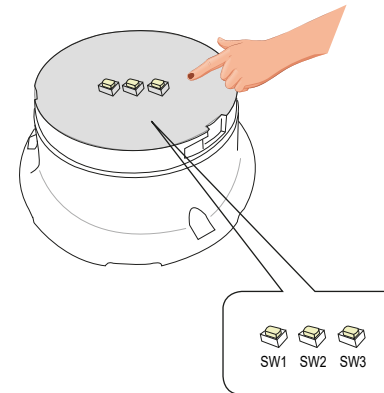

SW1: Light mode selection button.


SW2: Melody selection button.

SW3: Sound Intensity selection button.



- VOL1: 25% - lowest volume
- VOL2: 50% - medium level volume
- VOL3: 100% - highest volume

4

## SPARE PARTS



TERMSP0107



TERMSP0603