

- (EN)
- Electrical connection is to be made by trained electrical specialists only.
 - The product can be used indoors & outdoors.
 - The interior & exterior compatibility of the product is like in the pictures below.
 - The product should be installed where the vibration and heat is minimum.






TERMWL07 Model		
P/N	Power Supply	Current (mA) Max.
TERMWL0700	12-24V /DC	140mA
TERMWL0701	12-24V /DC	190mA
TERMWL0702	40-250 AC/DC 50Hz	28mA
TERMWL0703	40-250 AC/DC 50Hz	47mA

Weight		
P/N	Weight	Color
TERMWL0700	265-270gr	Red Green Blue Yellow
TERMWL0701	275-280gr	
TERMWL0702	300-310gr	
TERMWL0703	310-320gr	



*It is recommended that people with epilepsy should not use it.

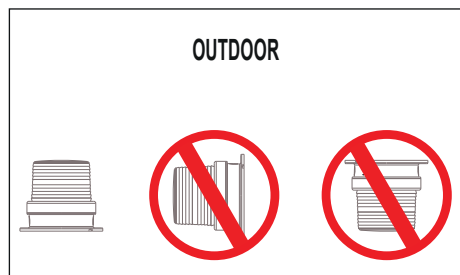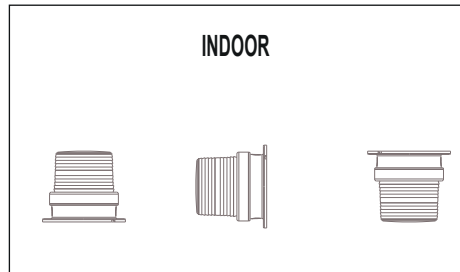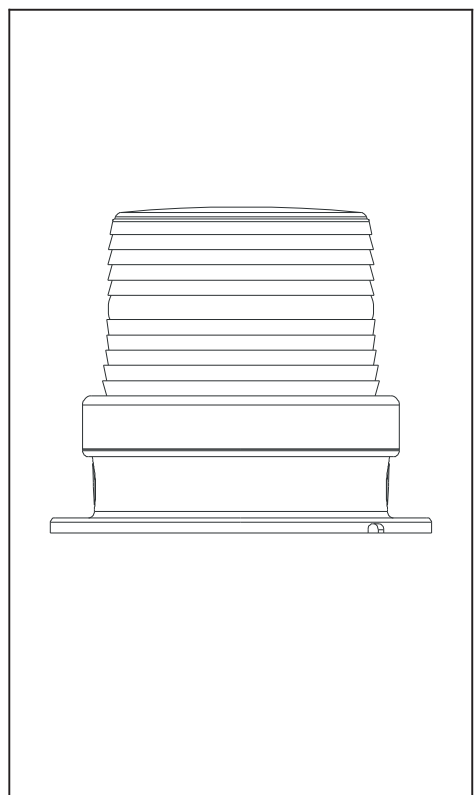

Light Pattern		
P/N	Light Pattern	Melody
TERMWL0700	Flashing Strobe Slow Flashing Steady	X
TERMWL0702		X
TERMWL0701		16
TERMWL0703		16

Sound Intensity		
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M1	99-111	87-98
M2	99-111	88-100
M3	91-109	77-93
M4	97-106	77-89
M5	106-116	91-99
M6	105-116	86-98
M7	88-108	73-90
M8	89-112	76-96
M9	99-113	84-96
M10	99-112	85-98
M11	71-116	67-99
M12	113-116	96-99
M13	108-111	93-99
M14	101-111	85-98
M15	113-123	92-102
M16	114-122	92-102



***Values may vary by +/- 5%.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
 Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
 Tel. +39 039 9911011 - Fax +39 039 9910445
 E-mail: info@ter.it - www.ter.it
 Sede Legale - Registered Office
 Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

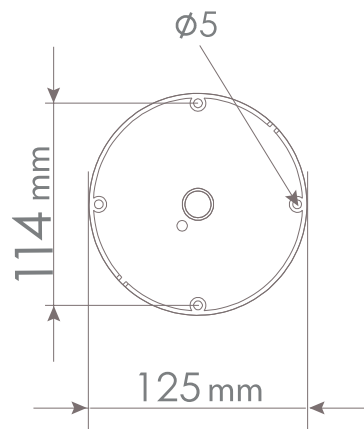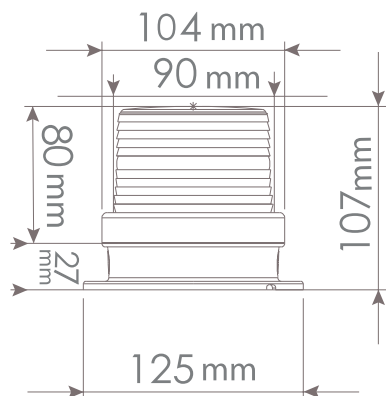

2

WIRING DIAGRAM

12-24V DC

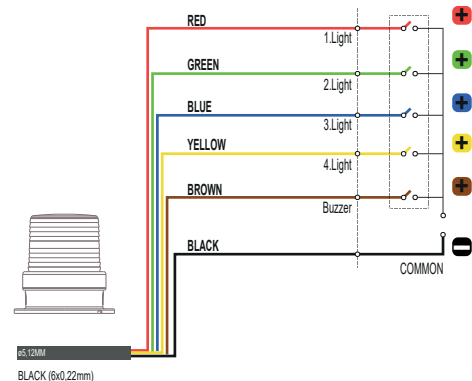

2a



WIRING INSTRUCTION

12-24V DC

EN

Light Wires: Red-Green-Blue-Yellow

Buzzer Wire: Brown


Common Wire: Black

- The 12-24V DC RGB series products are current-protected.
- The Melody and Buzzer wires can be connected to the NPN/PNP terminals of a PLC.
- When the cable specified is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order: **Red, Green, Blue, Yellow.**

3

WIRING DIAGRAM

40-250V AC/DC

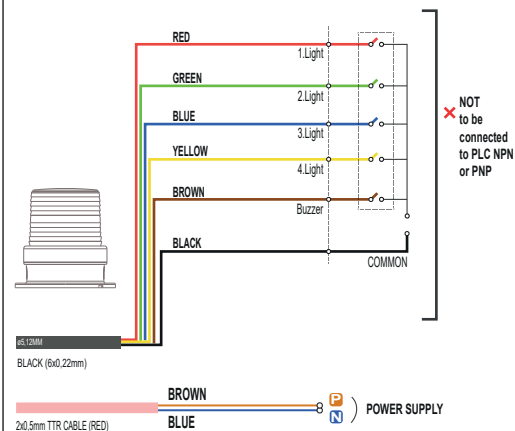

3a



WIRING INSTRUCTION

40-250V AC/DC

EN

Light Wires: Red-Green-Blue-Yellow

Buzzer Wire: Brown


Common Wire: Black

Power Supply Cable: 2x0.50 TTR (Blue-Brown)

- Do not supply power to the Light, Buzzer and Common Wires, and do not connect directly to PLC NPN or PNP terminals to avoid damage or malfunction. Only the power supply wires should be used to provide power to the system.
- The product warranty will be void if power is supplied to the Light, Buzzer and Common Wires.
- For Light and Buzzer, make a dry contact connection between the Light, Buzzer and the Black Common wire.
- When the cable specified is triggered, the corresponding light and melody are activated. In the event of multiple triggers, the product operates according to the color sequence, with priority given in the following order: **Red, Green, Blue, Yellow.**

4

LIGHT&MELODY ADJUSTMENT

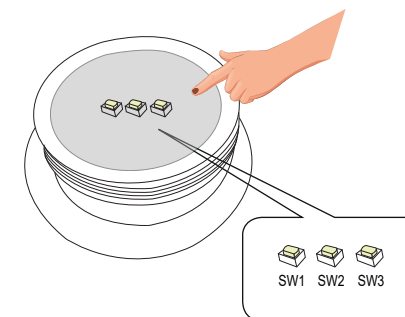

SW1: Light mode selection button.

SW2: Melody selection button.

SW3: Sound Intensity selection button.


- VOL1: 25% - lowest volume
- VOL2: 50% - medium level volume
- VOL3: 100% - highest volume

5


SPARE PARTS



TERMSP0702



TERMSP0109



TERMSP0602