



TERMWL10***



















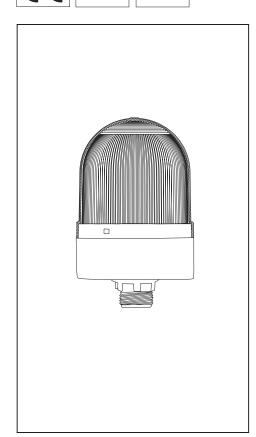





- Electrical connection is to be made by trained trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.







TERMWL10 Model				
P/N	Power Supply	Current (mA) Max.		
TERMWL10***	12-24V /DC	140mA		
TERMWL10*** (with sound)	12-24V /DC	190mA		

Light Pattern				
P/N	Light Pattern	Melody		
TERMWL1001 TERMWL1003 TERMWL1005 TERMWL1007	Flashing Strobe Slow Flashing Steady	Х		
TERMWL1000 TERMWL1002 TERMWL1004 TERMWL1006		16		

Sound Intensity				
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)		
M1	82-91	70-82		
M2	82-92	74-81		
M3	85-95	70-82		
M4	80-100	76-83		
M5	85-94	70-82		
M6	83-92	73-80		
M7	84-92	74-80		
M8	83-100	74-83		
M9	88-94	77-85		
M10	83-98	70-81		
M11	87-93	74-83		
M12	90-103	80-85		
M13	90-101	77-84		
M14	93-101	83-87		
M15	88-93	77-84		
M16	90-100	78-87		

^{***} Values may vary by +/- 5%.


ă.		
P/N	Weight	Color
TERMWL10***	240-250gr	Red Green Blue Yellow
TERMWL10*** (with sound)	250-260gr	



*It is recommended that people with epilepsi should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

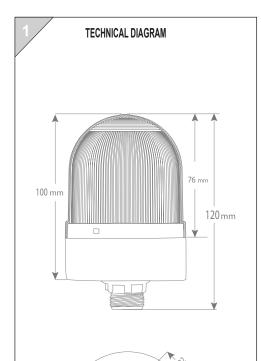

Ø 70

