





TERMES05***



(EN)

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The product should be installed where the vibration and heat is minimum.



TERMES05 Model

P/N	Power Supply	Current (mA) Max.
TERMES0501 TERMES0503 TERMES0505	24V/DC	15mA
TERMES0500 TERMES0502 TERMES0504	220V/AC	20mA



Sound Intensity

Sound Intensity (at 10cm)	
	105-110dB
TERMES0500 Sound Type TERMES0501 Sound Type	Continuous
TERMES0502 Sound Type TERMES0503 Sound Type	Intermittent
TERMES0504 Sound Type TERMES0505 Sound Type	Intermittent

*** Values may vary by +/- 5%.



Weight

P/N	Weight
TERMES05***	40-45gr



*It is recommended that people with epilepsy should not use it.






T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1

TECHNICAL DIAGRAM




Model: 35A - 35F

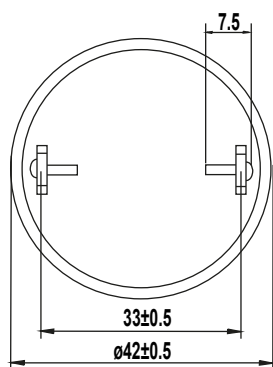

1

TECHNICAL DIAGRAM


Model: 35FT



2

WIRING DIAGRAM

24V DC - 220V AC



(EN)

- The SNT-35A24 / SNT-35F24 / SNT-35FT24 Series products operate with **direct current (DC)**.
- The SNT-35A22 / SNT-35F22 / SNT-35FT22 Series products operate with **alternating current (AC)**.
- When making cable connections, ensure proper alignment with the **positive (+)** and **negative (-)** terminals.