




TERMHD01***



EN

- Electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat is minimum.



TERMHD01 Model

P/N	Power Supply	Current (mA) Max.
TERMHD01***	12-24V AC/DC	447-531mA
TERMHD01***	85-250V AC/DC	41-58mA

R G Y B W

*** Indicates Light colors.
1-Red / 2-Green / 3-Yellow / 4-Blue / 5-White




Weight

P/N	Weight	Color
TERMHD01***	1815-1825gr	Red Green Yellow Blue White
TERMHD01***	1865-1875gr	




*It is recommended that people with epilepsi should not use it.

INDOOR

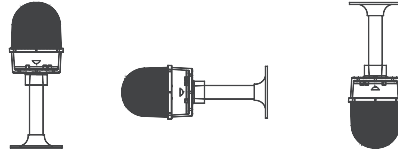

OUTDOOR

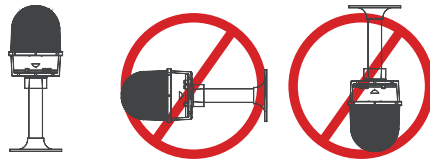

Light Pattern

P/N	Light Pattern	Melody
TERMHD0100*** TERMHD0101*** TERMHD0104*** TERMHD0105***	Strobe	X
TERMHD0102*** TERMHD0103*** TERMHD0106*** TERMHD0107***		10



Sound Intensity

Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	96-110	83-97
M2	94-109	77-96
M3	93-103	76-85
M4	90-104	74-85
M5	92-106	74-88
M6	93-110	79-94
M7	85-104	68-87
M8	94-110	76-96
M9	90-110	75-94
M10	88-103	74-92




***Values may vary by +/- 5%.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

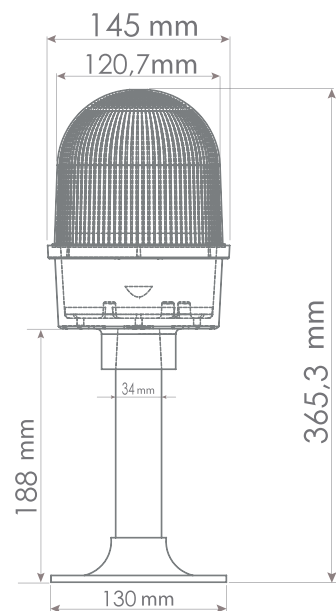

2

WIRING DIAGRAM


12-24V AC/DC

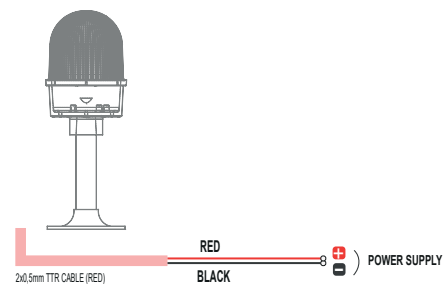

2

WIRING DIAGRAM

85-250V AC/DC

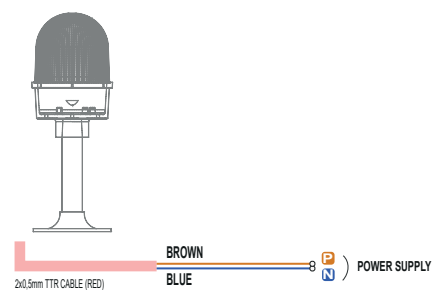

4

SPARE PARTS

