
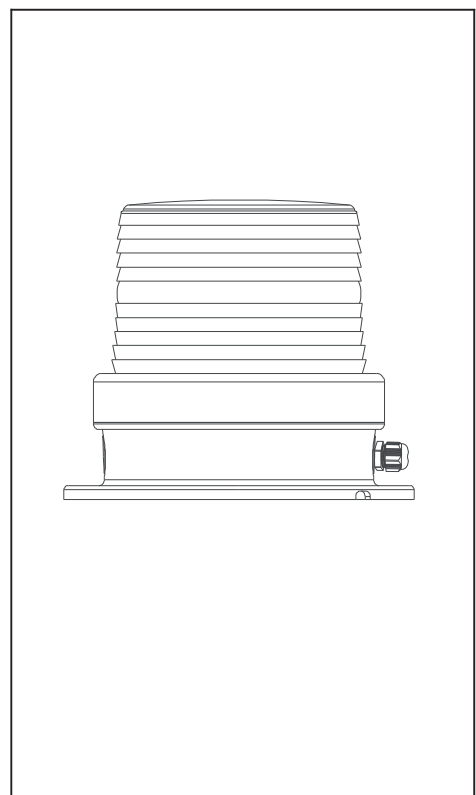
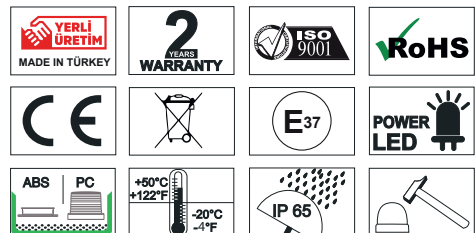
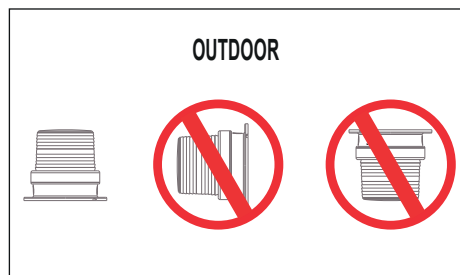


- (EN)
- Electrical connection is to be made by trained electrical specialists only.
 - The product can be used indoors & outdoors.
 - The interior & exterior compatibility of the product is like in the pictures below.
 - The product should be installed where the vibration and heat is minimum.

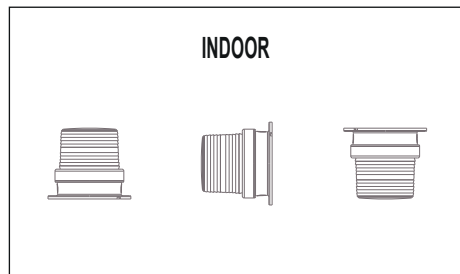

TERMSB09 Model		
P/N	Power Supply	Current (mA) Max.
TERMSB09***	12-24V AC/DC	447mA
TERMSB09***	12-24V AC/DC	531mA

R G Y B W

*** Indicates Light colors.
R-Red / G-Green / Y-Yellow / B-Blue / W-White

Light Pattern		
P/N	Light Pattern	Melody
TERMSB0900*** TERMSB0902***	Steady Flashing Right-Left Strobe Strobe	X
TERMSB0901*** TERMSB0903***	Slow Flashing Rotary Slow Rotary	10

Sound Intensity		
Melody	Sound Intensity (dB max) (10cm)	Sound Intensity (dB max) (100cm)
M0	-	-
M1	96-110	83-97
M2	94-109	77-96
M3	93-103	76-85
M4	90-104	74-85
M5	92-106	74-88
M6	93-110	79-94
M7	85-104	68-87
M8	94-110	79-96
M9	90-110	75-94
M10	88-103	74-92

***Values may vary by +/- 5%.

Weight		
P/N	Weight	Color
TERMSB09***	275-295gr	Red Green Yellow Blue White
TERMSB09***	290-300gr	




*It is recommended that people with epilepsy should not use it.



T.E.R. Tecno Elettrica Ravasi Srl a socio unico
Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Tel. +39 039 9911011 - Fax +39 039 9910445
E-mail: info@ter.it - www.ter.it
Sede Legale - Registered Office
Via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy

1


TECHNICAL DIAGRAM

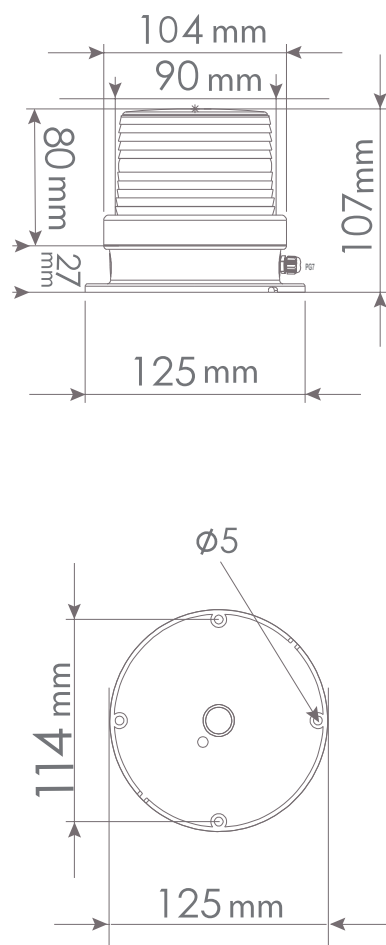

2

WIRING DIAGRAM

12-24V AC/DC

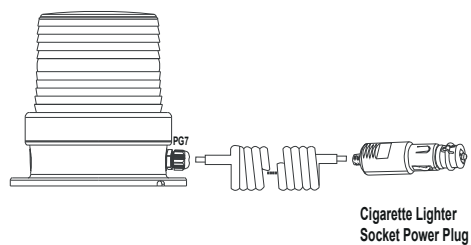


(EN)

- 20AWG Spiral Cable Curle Length 28cm.
- Spiral Cable Tensile range 4m

3

LIGHT&MELODY ADJUSTMENT

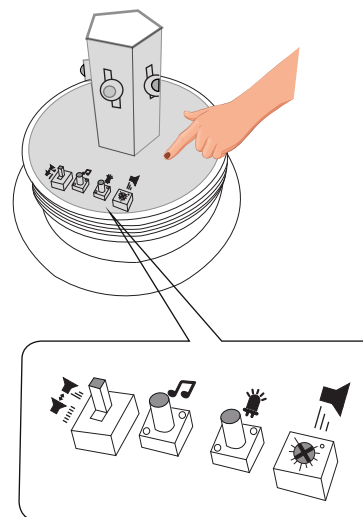


(EN)


- The potentiometer mode is active. The sound level can be manually adjusted using the potentiometer.
- The sound level increases gradually.
- To change melodies, press and release the melody button.
- To change the light mode, press and release the light button.
- The sound level can be adjusted using the potentiometer.

4



SPARE PARTS



TERMSP0702



TERMSP0102R (RED)
TERMSP0102G (GREEN)
TERMSP0102Y (YELLOW)
TERMSP0102B (BLUE)
TERMSP0102W (WHITE)



TERMSP0602